


## Milano ESALED DIMM DIG EM

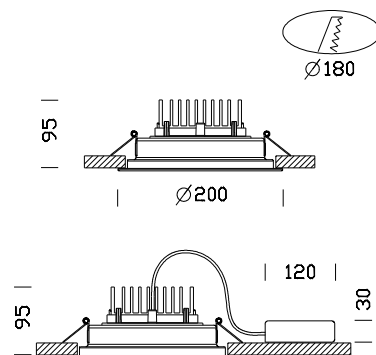

Code	Kg	Colour	Dimensions	W Tot	lamp
22081575-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081516-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081535-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 10°-CRI 80
22081576-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081517-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081536-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 25°-CRI 80
22081577-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081518-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081537-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 40°-CRI 80
22081578-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081519-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-2000lm @ 1A-4000K - 60°-CRI 80
22081570-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081511-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081530-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 10°-CRI 80
22081571-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081512-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081531-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 25°-CRI 80
22081572-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081532-9441	1.80	black + black	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 40°-CRI 80
22081573-9441	1.80	grey + glazed	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80
22081514-9441	1.80	white + white	0x0x95 Ø200	18	ESALED-1800lm @ 1A-3000K - 60°-CRI 80

---

Code	Kg	Colour	Dimensions	W Tot	lamp
------	----	--------	------------	-------	------

---

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: Metallized polycarbonate diffuser

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

ESALD: 3000/4000K - 1050mA - 1800/2000lm - CRI 80