


Milano AR LED

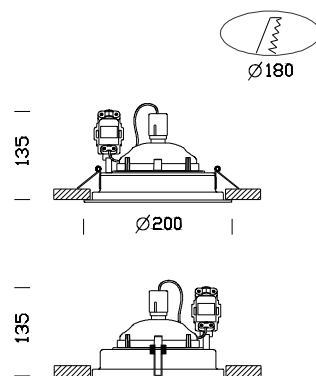

Code	Gear	Kg	Colour	Dimensions	lamp
22081579-00	CLD CELL	1.50	grey + glazed	0x0x135 Ø200	AR111 LED-G53-550lm-3000K - 45000h - 25°-Ra 82
22081515-00	CLD CELL	1.50	white + white	0x0x135 Ø200	AR111 LED-G53-550lm-3000K - 45000h - 25°-Ra 82
22081533-00	CLD CELL	1.50	black + black	0x0x135 Ø200	AR111 LED-G53-550lm-3000K - 45000h - 25°-Ra 82

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: 550lm - 3000K - CRI80 - 25°