

Milano Dark LED111 - low profile

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Coating: Power-coated with a UV-resistant polyester epoxy paint.

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.


Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources 3300lm - 3000K - CRI83 - 40°

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

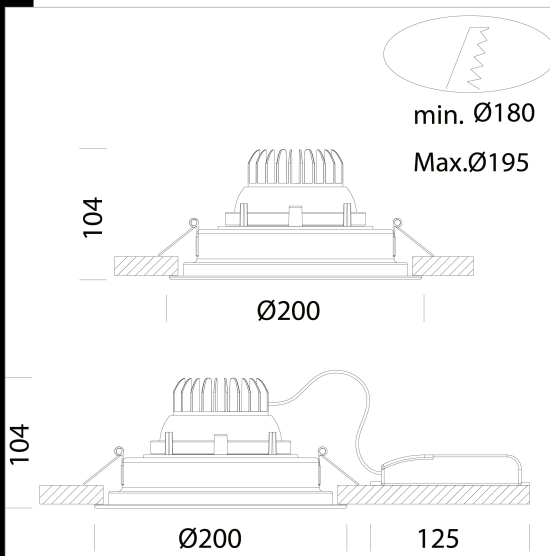

Code	Gear	Kg	Watt	Base	Lamps	Colour
22082310-00	CLD CELL	0,68	LED COB 17W		2000lm-3000K - 38°-CRI 93	METALLIC
22082370-00	CLD CELL	0,68	LED COB 17W		2000lm-3000K - 38°-CRI 93	METALLIC

Download

DXF 2D
- 82310.dxf