



Download
DXF 2D
- milcob.dxf



Milano COB white

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Coating: Power-coated with a UV-resistant polyester epoxy pain.

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED: 3000K - 3600lm - CRI 92

LED: 4000K - 3780lm - CRI 92


LED: 3000K - 4500lm - CRI 92

LED: 4000K - 5000lm - CRI 92

Power factor: >0,9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

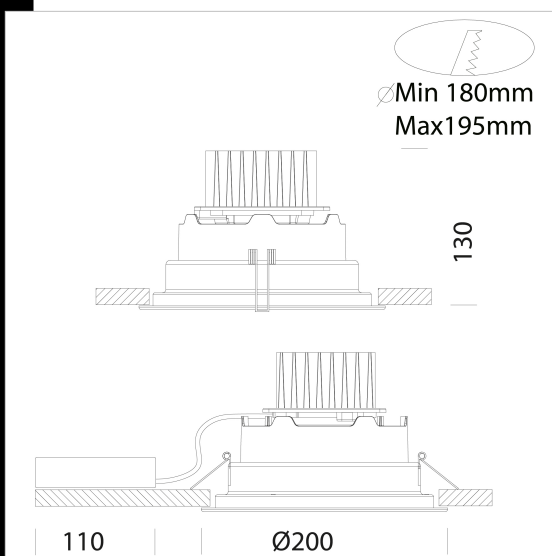

Code	Gear	Kg	Watt	Base	Lamps	Colour
22082410-00	CLD CELL	1,00	LED COB 29W		3600lm-3000K-CRI 92	WHITE
22082411-00	CLD CELL	1,00	LED COB 29W		3780lm-4000K-CRI 92	WHITE
22082510-00	CLD CELL	1,00	LED COB 36W	-	4500lm-3000K-CRI 92	WHITE
22082511-00	CLD CELL	1,00	LED COB 36W		5000lm-4000K-CRI 92	WHITE