


Milano 2000 TWIST DIMM - GEN III

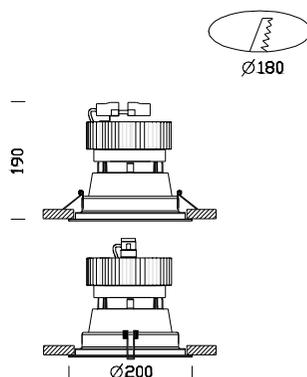

| Code | Gear | Kg | Colour | Dimensions | W Tot | lamp |
|-------------|------------|------|--------|--------------|-------|---|
| 22083061-00 | CLD CELL-D | 2.50 | metal. | 0x0x190 Ø200 | 26 | LED TWIST 2000-HIGH PROFILE-2000lm-4000K-CRI 80 |
| 22083081-00 | CLD CELL-D | 2.50 | Gold | 0x0x190 Ø200 | 26 | LED TWIST 2000-HIGH PROFILE-2000lm-4000K-CRI 80 |
| 22083014-00 | CLD CELL-D | 2.50 | white | 0x0x190 Ø200 | 26 | LED TWIST 2000-HIGH PROFILE-2000lm-4000K-CRI 80 |
| 22083074-00 | CLD CELL-D | 2.50 | Glazed | 0x0x190 Ø200 | 26 | LED TWIST 2000-HIGH PROFILE-2000lm-4000K-CRI 80 |

Adequate lighting ensures proper perception of the environment and enables us to feel comfortable with our surroundings. This is the concept underlying the creation of the Milano recessed floodlight, ideal for quick, low-cost installation in any exhibition setting and fulfil interior decorators' artificial lighting requirements.

Housing: Made of steel sheet.

Reflector: V2 self-extinguishing polycarbonate

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

Available in dimmable version phase cutting IGBT dimming. Passive dissipation system

LED: 4000K - 2000lm - CRI80 - 50000h.