



Download

DXF 2D
- miUsmall.dxf

Montaggi
- MILANO DLA G2 UGR19 REV3.pdf




Milano small UGR<19

Housing: made in aluminium with spring clips for recessed mounting. 60° Reflector: metallized and prismatic aluminium. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: >0,95

Luminous flux maintenance 70%: 56.000h (L70B50).

Photobiological safety class: exempt group EN62471.

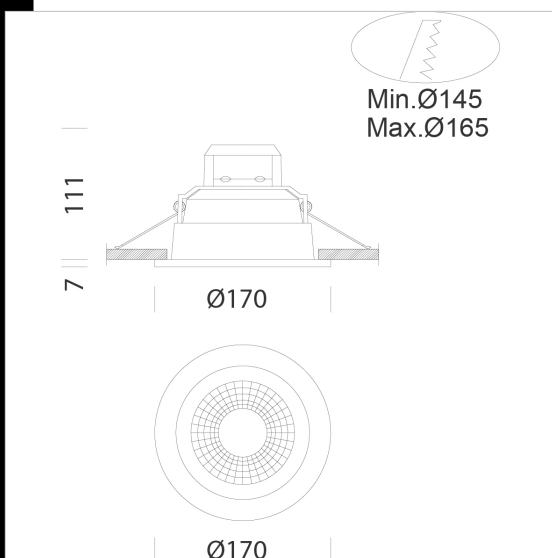

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22083118-00	CLD	0,38	LED-2130lm-3000K-60°-CRI>80	20 W	WHITE
22083119-00	CLD	0,37	LED-2210lm-4000K-60°-CRI>80	20 W	WHITE
22083118-1241	CLD CELL-D-D	0,53	LED-2130lm-3000K-60°-CRI>80	20 W	WHITE
22083119-1241	CLD CELL	0,52	LED-2210lm-4000K-60°-CRI>80	20 W	WHITE

Accessori



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated