


Milano Small Q - COIN DIMM - Home

A small-sized recessed downlight
 Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate. Colours : RAL9010 white, metallic, matt.
 Standard supply includes wire springs for 1 to 30 mm false-ceiling panels.
 Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 LED: 3000K - 1340lm - CRI80 - 40°
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 50.000h (L70B50).
 recessed \varnothing 74/78mm

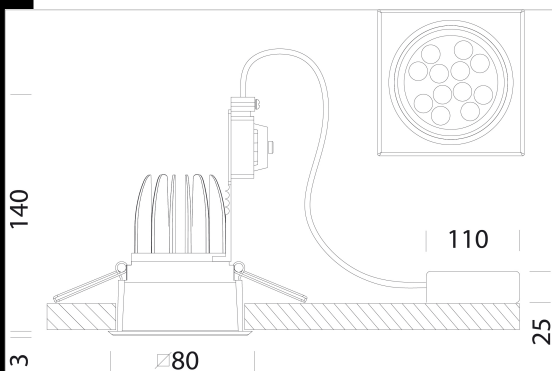

Code	Gear	Kg	Watt	Base	Lamps	Colour
22083211-00	CLD CELL-D	0,10	LED white 11W		1340lm-3000K - 40°-CRI>80	WHITE
22083261-00	CLD CELL-D	0,10	LED white 11W		1340lm-3000K - 40°-CRI>80	CHROME
22083271-00	CLD CELL-D	0,10	LED white 11W		1340lm-3000K - 40°-CRI>80	MATT

- v.a. HOTEL
- IP20
- ★ ★ ★
- CE
- UV.
- DIMM
- IK04
- v.l. IP40
- CLD CELL-D
- RG0

Download

DXF 2D
 - 83211.dxf