




Download

DXF 2D
- Milano Small1_111.dxf

Montaggi
- MILANO_SMALL_LED_111 rev0.pdf

Milano small 1 - LED 111

Housing: made in aluminium with spring clips for recessed mounting.
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529. LED: Luminous flux maintenance 80%: 50.000h (L80B20). Power factor >0.95.

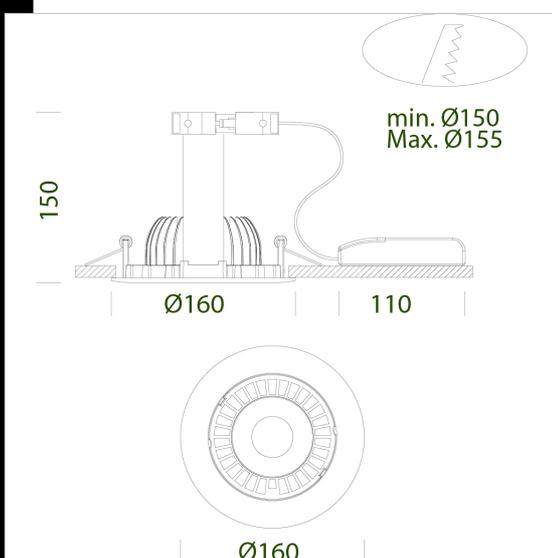

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22083819-00	CLD CELL	0.90	LED 111-3600lm-3000K-40°-CRI 83	31 W	WHITE
22083839-00	CLD CELL	0.76	LED 111-3600lm-3000K-40°-CRI 83	31 W	BLACK
22083879-00	CLD CELL	0.90	LED 111-3600lm-3000K-40°-CRI 83	31 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated