


Speaker 1

Housing/Reflector: made in painted white aluminium.
 Regulations: Manufactured in accordance with standards EN60598-1, EN60598-2-2.
 Power factor: ≥ 0.95
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 30.000h (L70B50).

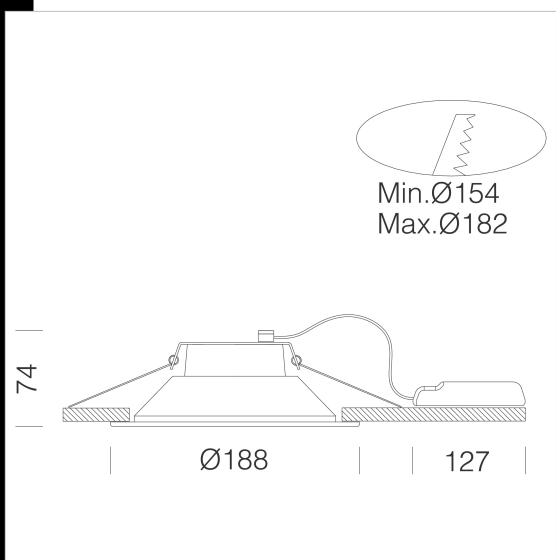

Download

DXF 2D
 - spk1.dxf
 Montaggi
 - SPEAKER rev7.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084410-00	CLD CELL	0,28	LED-1200lm-3000K-CRI 80	19 W	WHITE
22084411-00	CLD CELL	0,25	LED-1300lm-4000K-CRI 80	19 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated