




## Speaker 2

Housing/Reflector: made in painted white aluminium.  
 Regulations: Manufactured in accordance with standards EN60598-1, EN60598-2-2.  
 Power factor:  $\geq 0.95$   
 Photobiological safety class: Exempt group.  
 Luminous flux maintenance 70%: 30.000h (L70B50).

### Download

- DXF 2D  
- spk2.dxf
- Montaggi  
- SPEAKER rev7.pdf

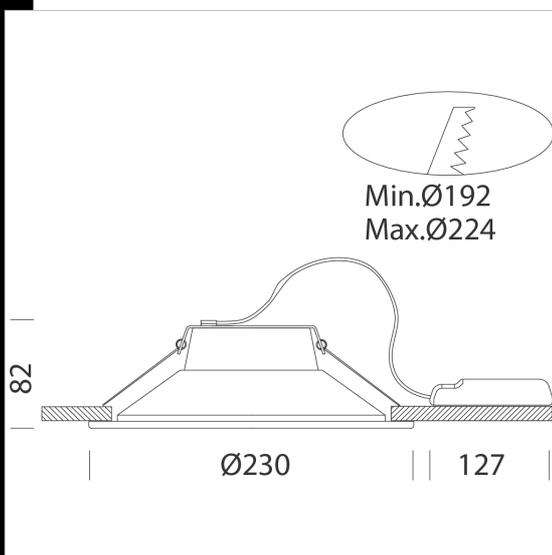

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084416-00	CLD CELL	0.30	LED-2205lm-4000K-CRI 80	25 W	WHITE
22084415-00	CLD CELL	0.30	LED-2051lm-3000K-CRI 80	25 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated