



Download


DXF 2D
- c1.dxf

Montaggi
- CORTESIA REV4.pdf



Cortesia 1

To be kept on all night, for transit areas, to serve as a courtesy light or ambient light. Housing: PC plastic in RAL 9010 colour; spotlight with built-in driver that can be connected directly to the electricity supply network. It can be installed on plasterboard walls using the mounting plate supplied as standard or with the junction box (not included). Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degrees of protection in accordance with EN60529 standards. Photobiological safety class: exempt group EN62471.

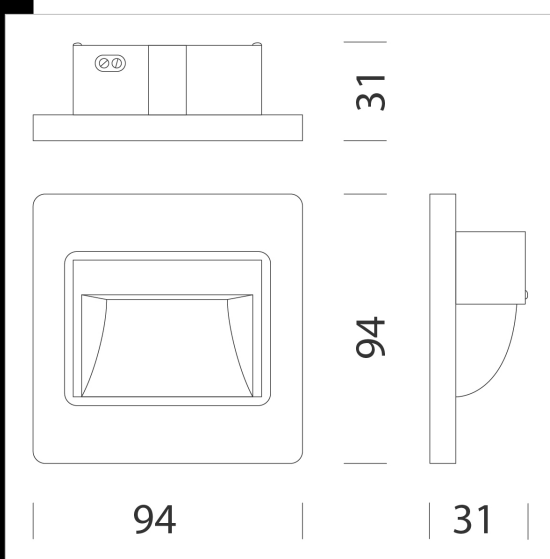

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084511-00	CLD CELL	0,15	LED-43lm-2700K-CRI 90	1 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated