




Mistral Q


Housing: made of aluminium complete with spring for recessed mounting.
 Lens: in PMMA with high efficiency output and very low glare rate. LED:
 luminous flux maintenance 80%: 50.000h (L80B20). Power factor >0.9.

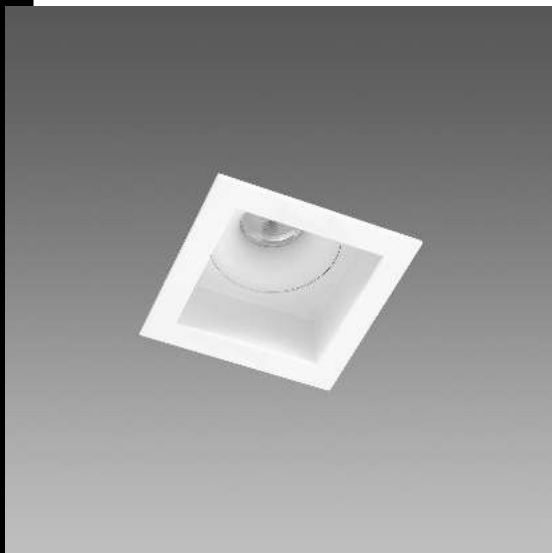

Download

DXF 2D
- mistralq.dxf

Montaggi
- MISTRAL R O REV0.pdf

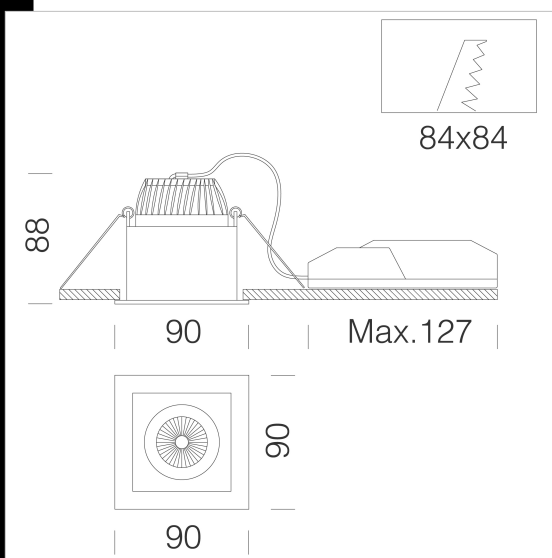

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084514-00	CLD	0,15	LED-800lm-3000K-40°-CRI 90	10 W	WHITE
22084534-00	CLD	0,15	LED-800lm-3000K-40°-CRI 90	10 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated