

CLD

IP40



IK07

**Download**


DXF 2D  
- curve.dxf

Montaggi  
- CURVE\_RIFLESSO.pdf



**Curve**

Curve: reflections of direct indirect light on the wall. Lighting for orientation and decorative effects. Body: painted aluminum, arranged for wall mounting. LED: luminous flux maintenance L70B50: 36.000h. Power factor >0.9.

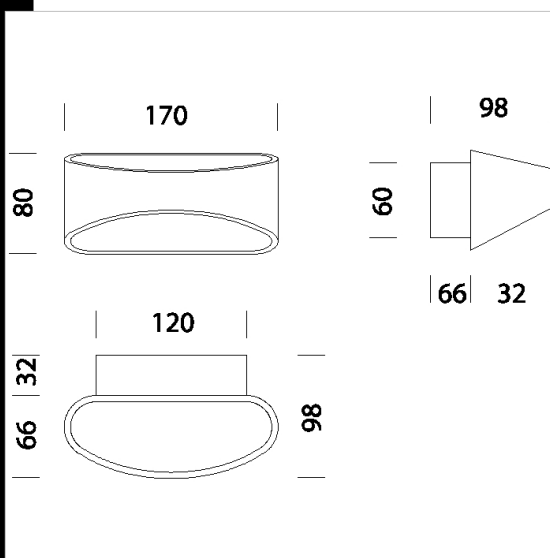

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084811-00	CLD	0,60	LED white 6W-351lm-3000K-CRI>80	6 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated