



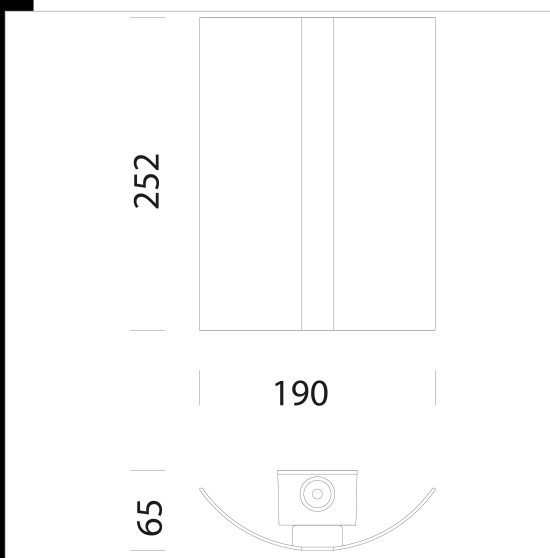

Download

- DXF 2D
- ines.dxf
- 3DS
- fosnova_ines.3ds
- 3DM
- fosnova_ines.3dm
- Montaggi
- ines.pdf
- BIM
- Ines - 20201005.zip

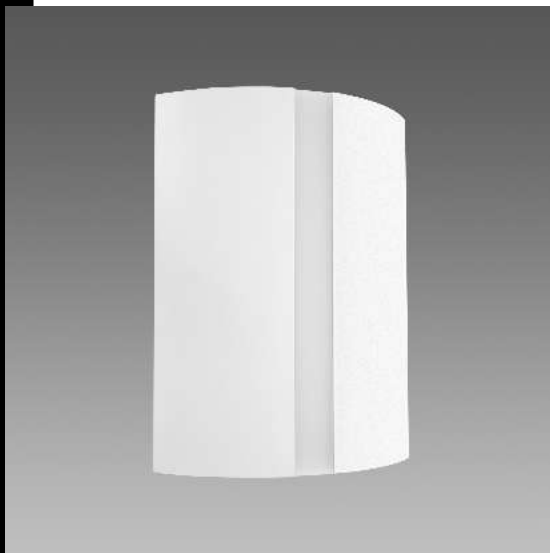

Ines

Simple and elegant: Ines offers a great degree of flexibility. Its sophisticated design and outstanding performance create amazing lighting effects for any architectural design. Housing: in aluminium complete with 2 LED sources with lens. Shield: front shield in die-cast aluminium with matt white coating and non-transparent polycarbonate diffuser. LED: Luminous flux maintenance 70% 30.000h (L70B50).

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22085010-00	CLD	0,90	LED-674lm-3000K-CRI 80	14 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated