

## King

King is a recessed floodlight designed to provide a solution to the lighting of environments requiring a high degree of protection.

Housing: Adjustable-angle, made of die-cast aluminium.

Reflector: High-performance oxidised and polished aluminium.

Diffuser: Tempered glass protection shield.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised.


Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. Flexible silicone insulated wire terminated with admiralty brass clamps, with fibreglass braid, cross-section: 1.5 sqmm. 2P+T terminal block (with plug-socket connector).

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Lamps: halogen, compact fluorescent energy-saving lamps included.

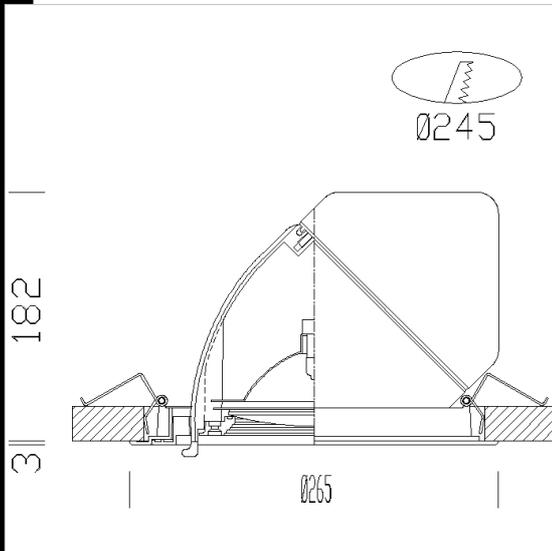

| Code        | Gear  | Kg   | Lumen-K-CRI                | WTot | Base   | Colour |
|-------------|-------|------|----------------------------|------|--------|--------|
| 22085414-00 | CNR-L | 3.35 |                            | 17 W |        | WHITE  |
| 22085212-00 | S+L   | 3.00 | ALO 70-1100lm-3000K-Ra 100 | 75 W | E27    | WHITE  |
| 22085179-00 | CTL   | 2.95 | ALO 50-950cd-2900K-Ra 100  | 51 W | GY6.35 | GREY   |
| 22085476-00 | CNR-L | 3.35 |                            | 17 W |        | SILVER |
| 22085278-00 | S+L   | 3.00 | ALO 70-1100lm-3000K-Ra 100 | 75 W | E27    | SILVER |
| 22085111-00 | CTL   | 2.95 | ALO 50-950cd-2900K-Ra 100  | 51 W | GY6.35 | WHITE  |

### Accessories



- Conveyo rmm. 165



- Glass + frame

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated