



Download


DXF 2D
- kingled.dxf

Montaggi
- KING_LED rev3.pdf



King LED111

King is a recessed floodlight designed to provide a solution to the lighting of environments requiring a high degree of protection.
Housing: Adjustable-angle, made of die-cast aluminium.
Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised.
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
Power factor: 0.95
Photobiological safety class: Exempt group.
Luminous flux maintenance 80%: 50.000h (L80B20).
fitting holes 240mm to 260mm

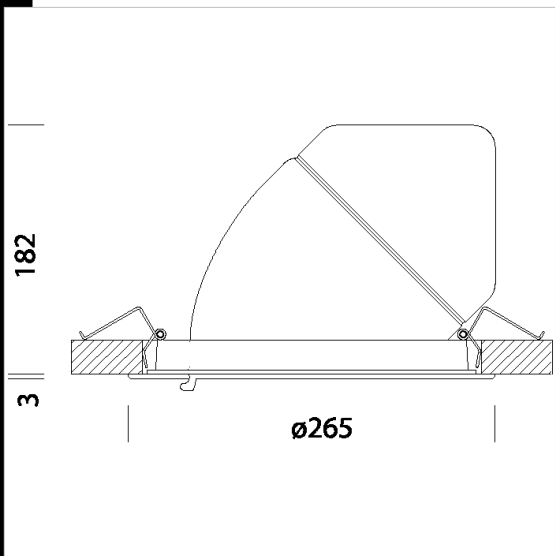

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22085613-00	CLD-D	3,45	LED 111-3800lm-4000K-40°-CRI 83	31 W	WHITE
22085673-00	CLD-D	3,40	LED 111-3800lm-4000K-40°-CRI 83	31 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated