


Sylon LED 3000K

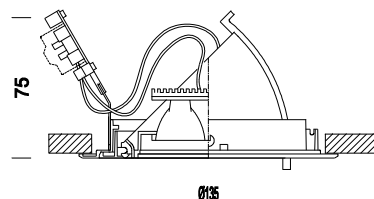

Code	Gear	Kg	Colour	Dimensions	lamp
22086310-00	CLD S+L	0.50	white	0x0x75 Ø135	POWERLED white-450lm-3000K-10°
22086360-00	CLD S+L	0.50	chrome	0x0x75 Ø135	POWERLED white-450lm-3000K-10°
22086370-00	CLD S+L	0.50	met. silver	0x0x75 Ø135	POWERLED white-450lm-3000K-10°
22086390-00	CLD S+L	0.50	shiny brass	0x0x75 Ø135	POWERLED white-450lm-3000K-10°
22086313-00	CLD S+L	0.50	white	0x0x75 Ø135	POWERLED white-450lm-3000K-25°
22086366-00	CLD S+L	0.50	chrome	0x0x75 Ø135	POWERLED white-450lm-3000K-25°
22086373-00	CLD S+L	0.50	met. silver	0x0x75 Ø135	POWERLED white-450lm-3000K-25°
22086393-00	CLD S+L	0.50	shiny brass	0x0x75 Ø135	POWERLED white-450lm-3000K-25°
22086316-00	CLD S+L	0.50	white	0x0x75 Ø135	POWERLED white-450lm-3000K-60°
22086366-00	CLD S+L	0.50	chrome	0x0x75 Ø135	POWERLED white-450lm-3000K-60°
22086376-00	CLD S+L	0.50	met. silver	0x0x75 Ø135	POWERLED white-450lm-3000K-60°
22086396-00	CLD S+L	0.50	shiny brass	0x0x75 Ø135	POWERLED white-450lm-3000K-60°

This line of vertically as well as horizontally adjustable recessed spotlights features easy lamp replacement; additionally, after removing the movable parts, the transformer can be replaced through the port in the outside clip.

Housing: Die-cast zamak, with a steel bracket holding the terminal block. Includes springs for recessed mounting.

Coating: Powder coated with polyester epoxy paint, UV-resistant. A different galvanic finishing process is used for chromium-plated and polished brass versions.

Regulations: Manufactured in accordance with standards EN60598 - 1 - CEI 34.21. Degree of protection in accordance with standards EN60529.

Complete with 1 module PowerLed 3X1,6W - 3000K - 450lm 500mA - 10/25/60°
Separate transformer required (code 22090890-00 max 3 spot - 500mA)
Separate transformer DIM 1-10V required (code 22090834-00 max 2 spot - 500mA - 700mA)
Separate transformer DIM DALI required (code 22090837-1241 max 3 spot - 500mA)