

Download

DXF 2D

- lutcoin.dxf

Montaggi

- LUTHOR BIG111 rev2.pdf



Luthor Big LED 111 - Professional

The range of Luthor recessed spotlights is expanded with three sizes. This enables to fit the spotlights in all fitting holes of the same line of products.

Luthor adjustable recessed LED spotlights offer technologically advanced light and are a very solid product with high quality and high performance to illuminate large commercial spaces.

Housing adjustable Big: in die cast aluminium

Painting: dust painted, using polyester epoxy paint to withstand UV rays.


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: ≥ 0.95

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

fitting holes 170mm to 178mm

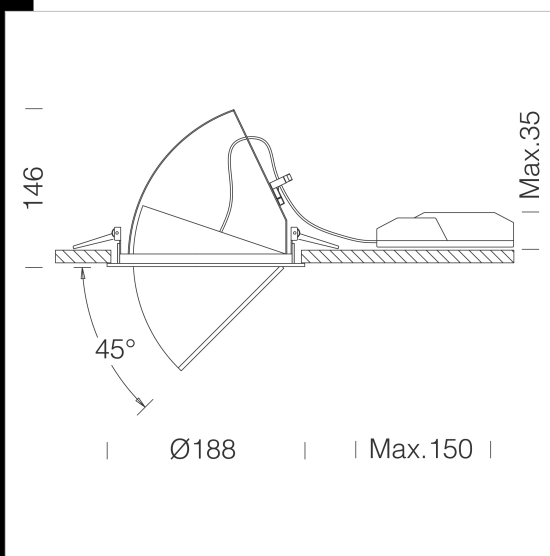

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22086810-00	CLD	1,10	LED 111-3286lm-3000K-40°-CRI 83	31 W	WHITE
22086870-00	CLD	1,70	LED 111-3286lm-3000K-40°-CRI 83	31 W	SILVER
22086810-68	CLD	1,09	LED 111-3516lm-4000K-40°-CRI 83	31 W	WHITE
22086870-68	CLD	1,70	LED 111-3516lm-3000K-40°-CRI 83	31 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated