


Corner MASTERLED AR111

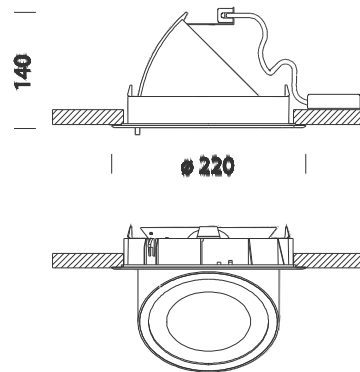

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22087718-00	CLD S+L	1.00	white	0x0x140 Ø220	10	MASTERLED AR111 10W-G53-578lm-3000K - 24°-CRI 82
22087700-00	CLD S+L	1.00	white	0x0x140 Ø220	15	MASTERLED AR111 15W-G53-745lm-3000K - 24°-CRI 82

This line of recessed adjustable-angle floodlights is designed to address the growing need for lighting solutions in shopping centres and shop windows, where the luminous flux has to be directed according to the products displayed.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: 10W - 578lm - 3000K - CRI82 - 25°

LED: 15W - 745lm - 3000K - CRI82 - 25°

MASTERLED: particularly suited for public spaces such as reception halls, entrance lobbies, corridors, stairways and bathrooms where lights stay on all day, 45,000 hours of lifespan, and 80% energy saving compared to ALO 35W.

Separate transformer required (code 22090817/10)