



Euro 1

A line of recessed fixtures for energy saving lamps and discharge lamps.

Housing: Die-cast aluminium; to be completed with accessories.

Reflector: Oxidised and polished aluminium.

Coating: Anionic electrocoating in acrylic white UV-stabilised lacquer.


Lampholder: Polycarbonate with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and heat-resistant (90°C) PVC-HT sheath, in accordance with CEI 20-20 standards; or flexible wire terminated with admiralty brass clamps, silicone insulation with fibreglass braid, cross-section 1.5 sqmm. 2P+T terminal block (maximum allowed lead cross section 2.5 sqmm.). Discharge lamp versions are equipped with thermal protection.

Equipment: Includes zinc-plated adjustable brackets, and safety springs to prevent any accidental fall of the diffuser.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Lamps: Supplied with energy-saving lamps.

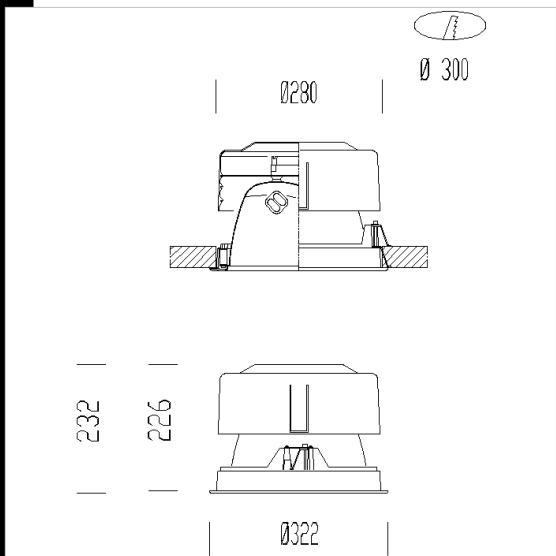

Download

DXF 2D
- euro1.dxf

Montaggi
- 768518 euro.pdf

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22089015-09	CELL-E	4.30	FLC 2x42T/E---	75 W	Gx24q-4	BIANCO
22089016-00	CELL	3.70	FLC 1x57T/E-4300lm-4000K-Ra 1b	63 W	Gx24q-5	BIANCO
22089015-12	CELL-D	1.73	FLC 2x42T/E---	92 W	Gx24q-4	BIANCO
22089012-00	CELL	1.60	PL-TX 2x42-3200lm-3000K-Ra 82	94 W		BIANCO
22089013-09	CELL-E	4.90	FLC 2x26+26D---	76 W	G24d-3	BIANCO
22089015-00	CELL	1.75	FLC 2x42T/E-3200lm-3000K-Ra 1b	94 W	Gx24q-4	BIANCO
22089014-12	CELL-D	1.90	FLC 2x32T/E---	71 W	Gx24q-3	BIANCO
22089014-00	CELL	1.90	FLC 2x32T/E-2400lm-3000K-Ra 1b	70 W	Gx24q-3	BIANCO
22089017-00	CELL	1.90	FLC 2x42T/E---	94 W	Gx24q-4	BIANCO
22089014-09	CELL-E	4.30	FLC 2x32T/E---	72 W	Gx24q-3	BIANCO

Accessories



- Silk-screen printed glass



- Dark ring



- Prismatic ring



- Glass

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated