

Euro 5



A line of recessed fixtures for energy saving lamps

Housing: Die-cast aluminium;

Reflector: Oxidised and polished aluminium.


Coating: Anionic electrocoating in acrylic white UV-stabilised lacquer

Lampholder: ceramic with silver-plated contacts.


Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section and heat-resistant (90°C) PVC-HT sheath, in accordance with CEI 20-20 standards; or flexible wire terminated with admiralty brass clamps, silicone insulation with fibreglass braid, cross-section 1.5 sqmm. 2P+T terminal block (maximum allowed lead cross section 2.5 sqmm.). Discharge lamp versions are equipped with thermal protection.

Equipment: Includes zinc-plated adjustable brackets, and safety springs to prevent any accidental fall of the diffuser.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

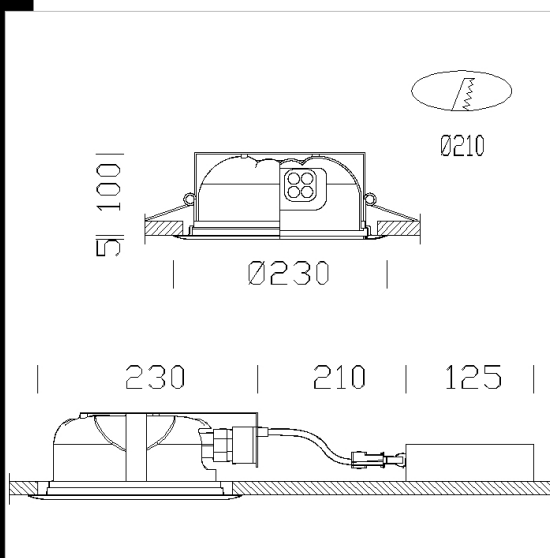

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22089316-09	CELL-E	2.05	FLC 2x26D-D/E-1800lm-4000K-Ra 1b	0 W	G24d-3	WHITE
22089316-00	CELL	1.15	FLC 2x26D/E-1800lm-4000K-Ra 1b	55 W	G24q-3	WHITE

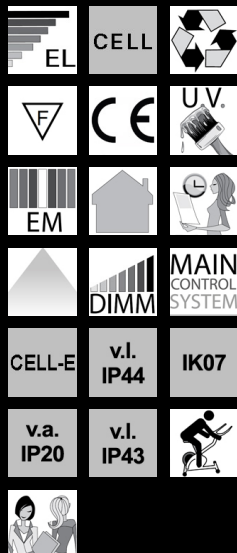

Download

DXF 2D
- euro_5.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated