




Download

DXF 2D
- 89576.dxf



Compendio LED111

Thanks to its extreme versatility, Compendio includes recessed mounting among its installation options. Multi-recessed version also available.
 Housing: Die-cast aluminium, with gear box encased inside the structure.
 Coating: Acrylic-resin liquid paint, UV-stabilised .
 Standard supply: Separate gear box equipped with plug socket connector. When the optic compartment rotates, the port is closed by a plate that dissipates the heat.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.95
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 50.000h (L70B50).
 fitting holes 190mm to 200mm

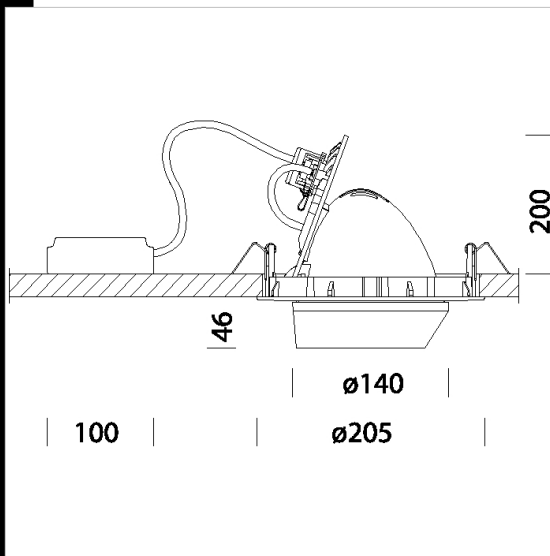

Codice	Cablaggio	Kg	Lumen Output-K-CRI	WTot	Colore
22089576-00	CLD CELL-D	1.45	LED 111-3600-4000K-40°-CRI 83	35 W	ARGENTO
22089575-00	CLD CELL-D	1.45	LED 111-3600-4000K-24°-CRI 83	35 W	ARGENTO

Accessori



- Baffle louvre



- Conveyor



- Filter Compendio

Il flusso luminoso riportato indica il flusso uscente dall'apparecchio con una tolleranza di $\pm 10\%$ rispetto al valore indicato. I W tot sono la potenza totale assorbita dal sistema e non supera il 10% del valore indicato.