


700mA DIM DALI power supply

M1 A: min 4spot - max 18spot
M1 B: min 4spot - max 18spot
M2: min 2spot - max 9spot
M3: min 2spot - max 6spot
M5: min 1spot - max 3spot

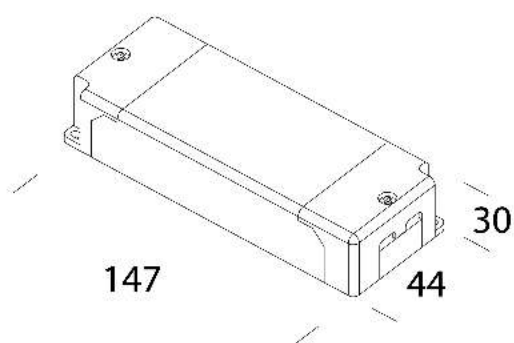

Code	Gear	Kg	WTot
22090813-1241	CLD	0,14	0 W

Prodotti



- Spot M1-A - ceiling - UGR<19



- Spot M1-B - ceiling - UGR<19



- Spot M2 - ceiling - UGR<19



- Spot M3 - ceiling - UGR<19



- Spot M5 - ceiling - UGR<19

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated