


3° IP
IK

Download
DXF 2D
- trfrang.dxf



Four sided shutter

In steel. Used to direct the light beam.

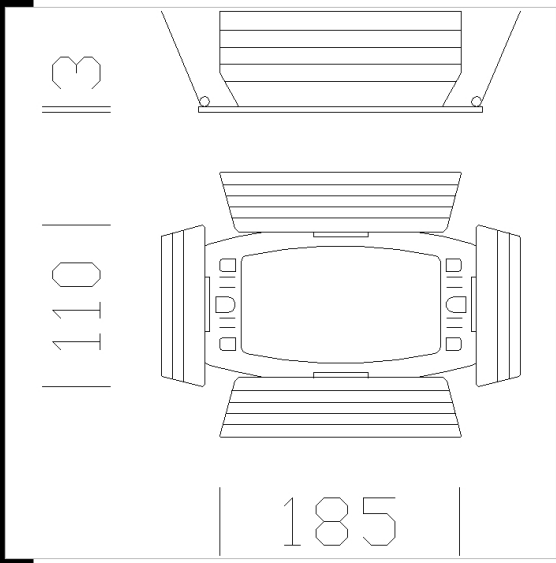

Code	Kg	WTot	Colour
22091312-00	0,00	0 W	WHITE
22091333-00	0,00	0 W	BLACK
22091334-00	0,34	0 W	BLACK
22091314-00	0,34	0 W	WHITE
22091374-00	0,35	0 W	SILVER

Prodotti



- Trial LED - COB



- Trial-one ceramic



- Trial-One LED

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated