




Download

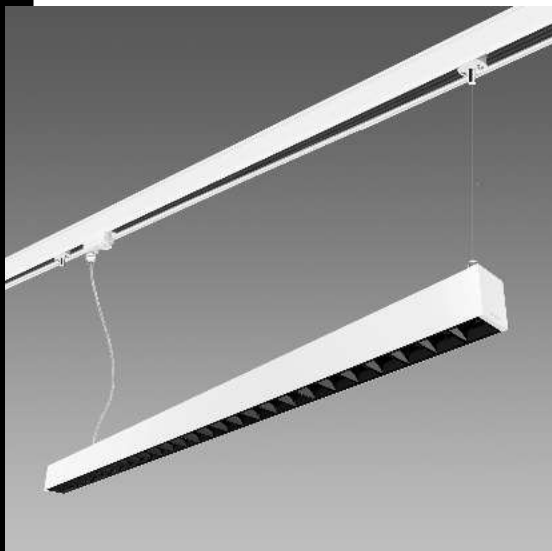

Suspension attachment for track

Supplied with steel wire, mechanical adapter (2 per pack), power adapter with power cord.

Code	Kg	WTot	Colour
22091432-00	0,90	0 W	BLACK
22091412-00	0,90	0 W	WHITE

Prodotti



- Liset 2.0 - suspension - direct



- Liset 2.0 - suspension - direct / indirect light - Dark light -



- Liset 2.0 - suspension - direct -



- Liset 2.0 - suspension - direct/indirect light - comfort



- Liset 2.0 - suspension - direct/indirect light - with polycarbonate diffuser



- Liset 2.0 HE - suspension - direct light - UGR<19



- Liset 2.0 HE - suspension - direct light - 25° bi-asymmetric



- Liset 2.0 HE - suspension - direct light - 25° asymmetric



- Liset 2.0 HE - suspension - direct light - 90°



- Liset 2.0 TW - suspension - direct - comfort optics - UGR<19



- Liset 2.0 HCL - suspension - direct - comfort optics - UGR<19



- Liset 2.0 TW - suspension - direct - with polycarbonate diffuser



- Liset 2.0 HCL - suspension - direct - with polycarbonate diffuser



- Liset 2.0 - suspension - direct - with polycarbonate diffuser



- Liset 2.0 HE - suspension - direct light - 30°x80°

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated