

v.l.
IP43


Download

DXF 2D
- 91816.dxf



Sandblasted glass

Tempered glass finish. Micro-stretched sheet steel ring insert between glass and ring, to stop insects.

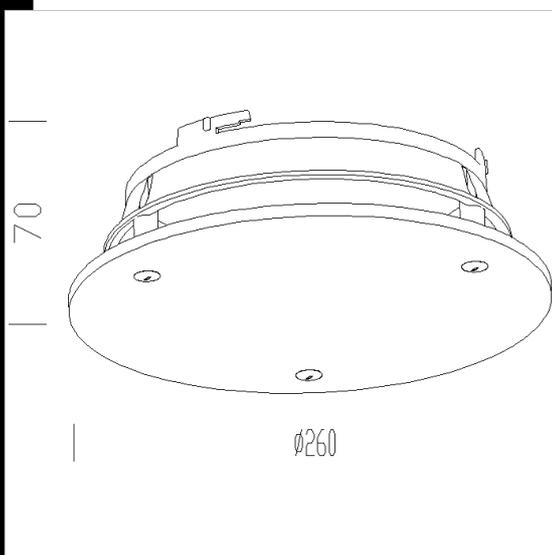

| Code | Kg | WTot | Colour |
|-------------|------|------|-------------|
| 22091816-00 | 0.95 | 0 W | SANDBLASTED |

Products



- Energy 2000



- Energy 9 SAB with glass



- Energy 2000 with box



- Energy 10 SAB with glass



- Energy EM

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated