


Download  
DXF 2D  
- 92060.dxf

## Box

Supplied with igniter, ballast, capacitor and terminal block heat-proof transformer. IP20 protection in double insulation. It can be installed on surfaces requiring the F brand.

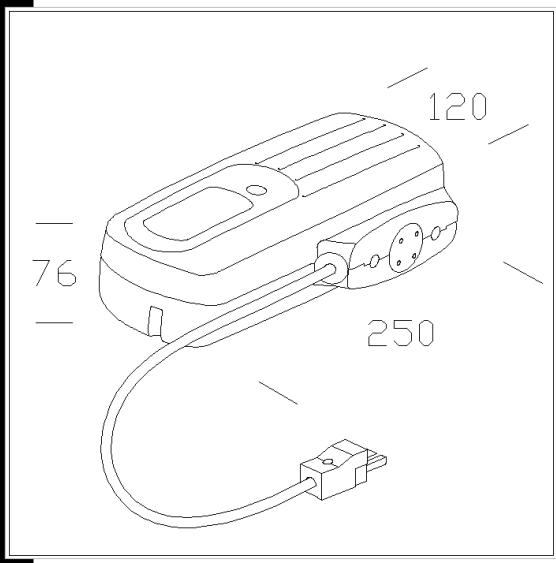

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated