

Matrix A2 LED111 - Universal adapter


Housing: In die-cast aluminium with central shaft to carry cables.
Coating: with a UV-stabilised powder acrylic-resin paint
Equipment: Supplied with an aiming bar .
Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
Luminous flux maintenance L80B20: 50.000h.
Power factor >0.9
Photobiological safety class: exempt group EN62471.



Download

DXF 2D
- 100172.dxf

Montaggi
- MATRIX A-B rev1.pdf

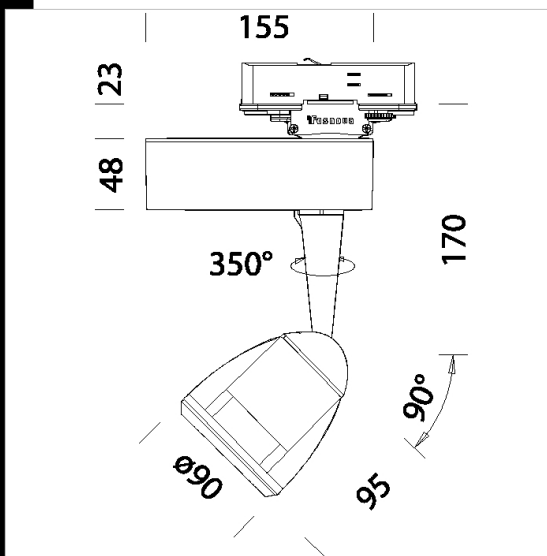

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22100172-00	CLD CELL	1.05	LED-1300lm-3000K-40°-CRI 83	14 W	ARGENTO

Accessories



- Universal adapter recessed



- Universal adapter base

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated