


Matrix B1 MASTERLED AR111 - Universal adapter

Housing: In die-cast aluminium with central shaft to carry cables.
 Coating: with a UV-stabilised powder acrylic-resin paint
 Equipment: Supplied with an aiming bar .
 Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.
 LED 15W - 3000K - 770lm - 24° - CRI 80 - DIMM igbt
 Luminous flux maintenance L70B50: 40.000h.
 Power factor >0.9
 Photobiological safety class: exempt group EN62471.

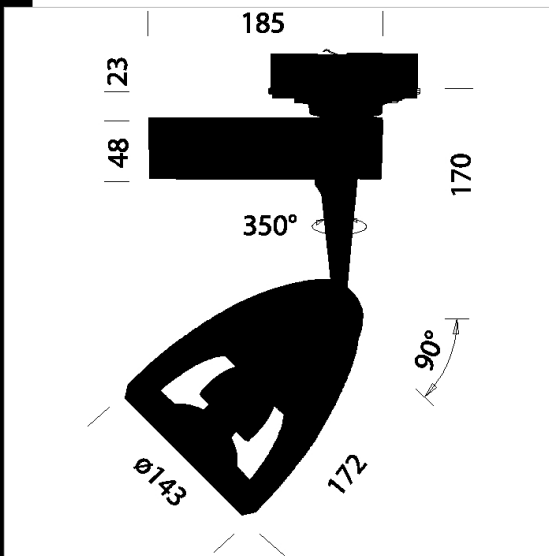

Code	Gear	Kg	Watt	Base	Lamps	Colour
22100437-00	CLD CELL-D	1,65	MASTERLED AR111 15W		770lm-3000K - 24°-CRI 80	BLACK
22100477-00	CLD CELL-D	1,70	MASTERLED AR111 15W		770lm-3000K - 24°-CRI 80	SILVER
22100417-00	CLD CELL-D	1,85	MASTERLED AR111 15W		770lm-3000K - 24°-CRI 80	WHITE

Accessories



- Universal adapter recessed



- Universal adapter base



- Conveyor mm.133

Download
 DXF 2D
 - 100473.dxf