
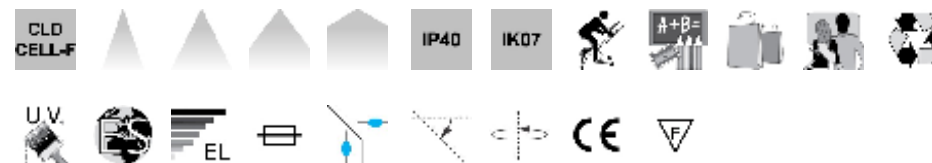


Matrix B6 ESALED

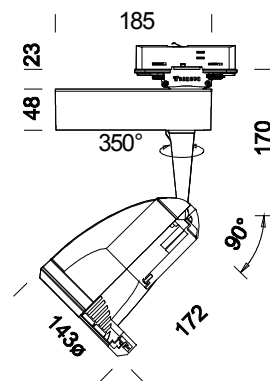

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22101375-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-1800lm-3000K - 10°-CRI 80
22101376-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-1800lm-3000K - 25°-CRI 80
22101377-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-1800lm-3000K - 40°-CRI 80
22101378-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-1800lm-3000K - 60°-CRI 80
22101370-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-2000lm-4000K - 10°-CRI 80
22101371-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-2000lm-4000K - 25°-CRI 80
22101372-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-2000lm-4000K - 40°-CRI 80
22101373-00	CLD CELL-F	1.70	met. silver	143x143x340 Ø143	18	ESALED-2000lm-4000K - 60°-CRI 80

Housing: In die-cast aluminium with central shaft to carry cables.

Coating: with a UV-stabilised powder acrylic-resin paint

Electric gear: 230 V/50 Hz power supply transformer. Silicone wire with fibreglass braid, cross-section 1.0 sqmm.

Equipment: Supplied with an aiming bar .

Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

ESALED: 3000/4000K - 1050mA - 1800/2000lm - CRI 80