

## Matrix Q9 Spot - Universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object.

Housing: in die-cast aluminium with a central shaft to carry cables.

Coating: UV-resistant acrylic resin powder coating.

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.


Possibility to select drive current (350, 500, 700mA) using a switch inside the driver.

On request: available in several colour combinations.

Luminous flux maintenance 80%: 50.000h (L80B20)

Power factor >0.95

Photobiological safety class: exempt group EN62471.

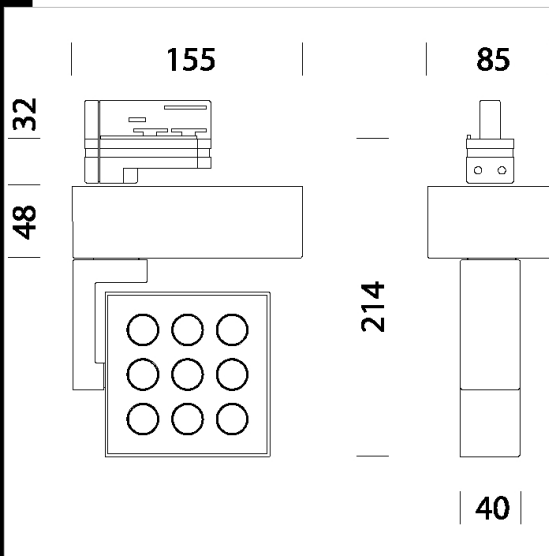

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22101430-00	CLD CELL	1,30	LED 9x2.7W-1560lm-4000K-CRI 90	27 W	NERO
22101470-00	CLD CELL	1,30	LED 9x2.7W-1560lm-4000K-CRI 90	27 W	ARGENTO
22101410-00	CLD CELL	1,30	LED 9x2.7W-1560lm-4000K-CRI 90	27 W	BIANCO

### Accessories



- Universal adapter recessed



- Universal adapter base

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated