


info@fosnova.it - http://www.fosnova.it

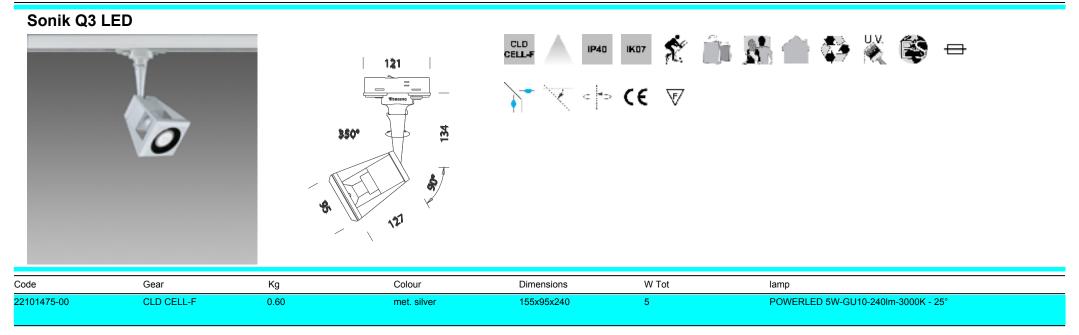

Housing: in die cast aluminium with central shaft to allow wires to pass through

Painting: dust painted using acrylic resin based paint stabilised against UV rays

Lampholder: ceramic type with silver-plated contacts or phosphor bronze contacts

Equipment: supplied complete with small directional alignment bar

Standards: Manufactured in compliance with EN 60598-1-CEI 34.21 standards, with a degree of protection complying with EN 60529 standards.

LED: 5W - 3000K - 25°