


## Sonik Q2 - Universal adapter

Housing: in die cast aluminium with central shaft to allow wires to pass through  
 Reflector: oxidised and polished aluminium parabola  
 Diffusor: heat treated glass  
 Painting: dust painted using acrylic resin based paint stabilised against UV rays  
 Lampholder: ceramic type with silver-plated contacts or phosphor bronze contacts  
 Equipment: supplied complete with small directional alignment bar  
 Standards: Manufactured in compliance with EN 60598-1-CEI 34.21 standards, with a degree of protection complying with EN 60529 standards.

### Download

DXF 2D  
 - sonikbin.dxf

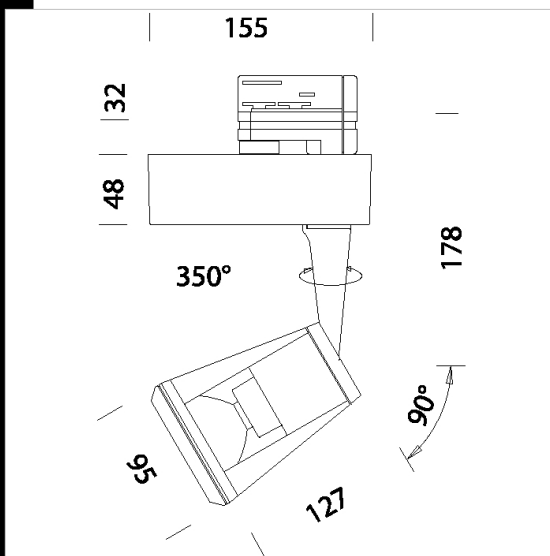

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22101675-00	CELL	1.10	CDM-R mini 50 elite-7000cd-3000K-40°-Ra 90	58 W	Gx10	SILVER
22101671-00	CTL	1.10	DIGR 35 IRC-4100cd-3000K-	38 W	GU5.3	SILVER
22101673-00	CELL	1.10	CDM-R mini 35 elite-8500cd-3000K-25°-Ra 90	47 W	Gx10	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated