




## Sonik Q5 - Universal adapter

Housing: in die cast aluminium with central shaft to allow wires to pass through  
 Reflector: oxidised and polished aluminium parabola  
 Diffusor: heat treated glass  
 Painting: dust painted using acrylic resin based paint stabilised against UV rays  
 Lampholder: ceramic type with silver-plated contacts or phosphor bronze contacts  
 Wiring: 230/50Hz power supply with electronic ballast. Silicon cable with the glass yarn sheath 1.0 sq.mm. cross-section.  
 Equipment: supplied complete with small directional alignment bar  
 Standards: Manufactured in compliance with EN 60598-1-CEI 34.21 standards, with a degree of protection complying with EN 60529 standards.

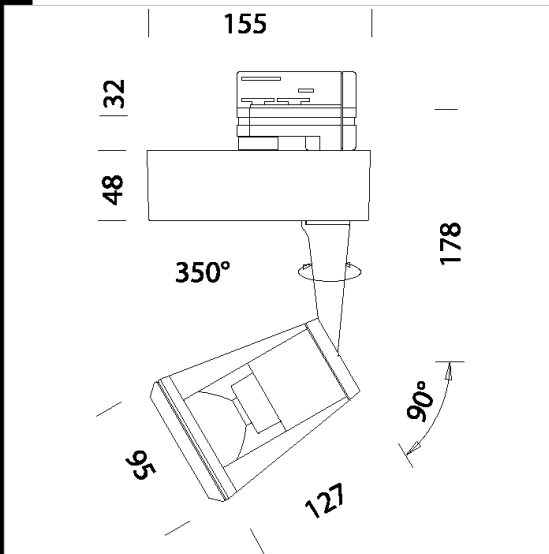

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22101974-00	CELL	1.10	CDM-TM 35 elite-3500lm-3000k-Ra 90	30 W	PGJ5	SILVER

### Accessories



- Coloured Filter - Sonik

Download  
 DXF 2D  
 - sonikbin.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated