




Sonik Q6 - Universal adapter

Housing: in die cast aluminium with central shaft to allow wires to pass through
 Reflector: oxidised and polished aluminium parabola
 Diffusor: heat treated glass
 Painting: dust painted using acrylic resin based paint stabilised against UV rays
 Lampholder: ceramic type with silver-plated contacts or phosphor bronze contacts
 Wiring: 230/50Hz power supply. Silicon cable with the glass yarn sheath 1.0 sq.mm. cross-section.
 Equipment: supplied complete with small directional alignment bar
 Standards: Manufactured in compliance with EN 60598-1-CEI 34.21 standards, with a degree of protection complying with EN 60529 standards.

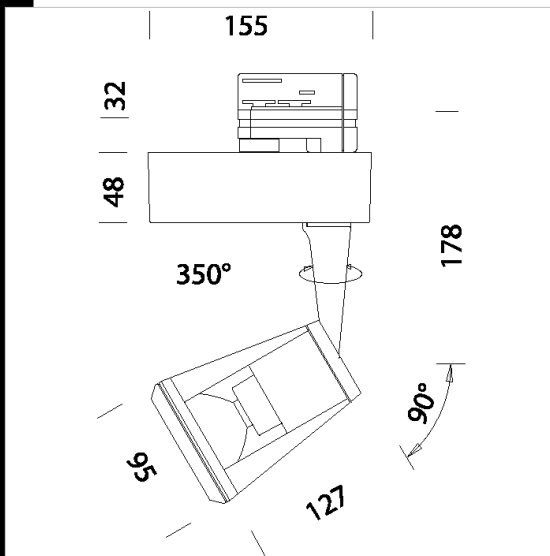

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22102075-00	CELL	1.10	CDM-TC 35 elite-3900lm-3000K-Ra 90	47 W	G8.5	SILVER

Accessories



- Coloured Filter - Sonik

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated