

## Jolly 1

Flexibility, saving and light quality.

These are the strengths of this new track-mounted spotlight incorporating latest generation LEDs. In addition to colour temperatures ranging between 3000K and 4000K, it has a long service life (50,000 hours) and excellent luminous flux maintenance. Anti-glare, screened optics without UV emissions are important features for the lighting of stores, showrooms and commercial centres.

Housing: in die-cast aluminium.

Reflector: in aluminium

Coating: UV-resistant polyester epoxy powder coating.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Universal Adapter


LED: 3000K - 3150lm - 38° - 31W - CRI 92

LED: 4000K - 3250lm - 38° - 31W - CRI 92

Luminous flux maintenance 70% 50000h (L70B50)

Power factor: >0,9

Photobiological safety class: exempt group EN62471.

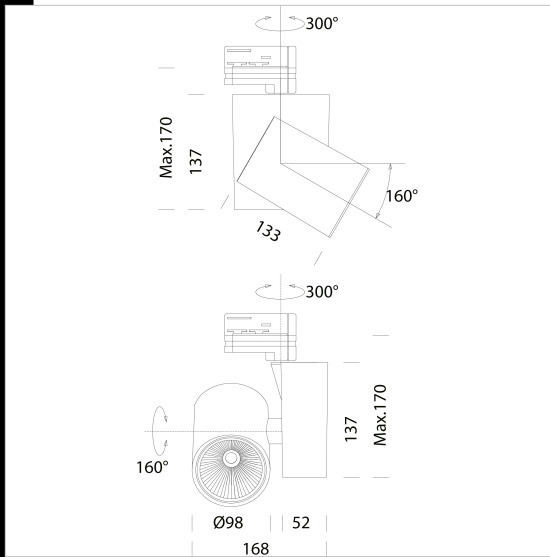

Code	Gear	Kg	Watt	Base	Lamps	Colour
22102610-00	CLD CELL	1,33	LED COB 31W		3150lm-3000K - 38°-CRI 92	WHITE
22102611-00	CLD CELL	1,33	LED COB 31W		3250lm-4000K - 38°-CRI 92	WHITE

### Download

DXF 2D  
- jolly1nm.dxf