
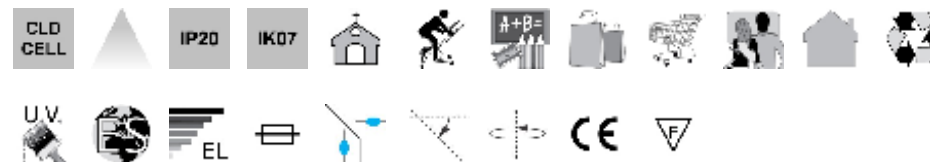


Jolly 3

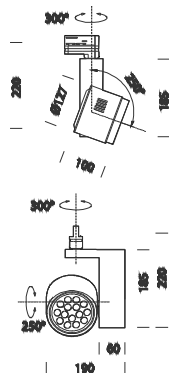

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22102310-00	CLD CELL	1.50	white	90x200x230 Ø130	18	LED 15x1W white-910lm-3000K-CRI 90

Flexibility, saving and light quality.

These are the strengths of this new track-mounted spotlight incorporating latest generation LEDs. In addition to colour temperatures ranging between 3000K and 4200K, it has a long service life (50,000 hours) and excellent luminous flux maintenance. Anti-glare, screened optics without UV emissions are important features for the lighting of stores, showrooms and commercial centres.

Housing: in die-cast aluminium with bayonet-like closure for easy maintenance.

Coating: UV-resistant polyester epoxy powder coating.

Equipment: adjustable around its vertical axis from 0° to 355°

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.

Universal Adapter

LED: 3000K - 350mA - 910lm - 20° - CRI 90.