



Download

DXF 2D
- jolly1nm.dxf

Montaggi
- JOLLY rev7.pdf



Jolly 1

Flexibility, saving and light quality.

These are the strengths of this new track-mounted spotlight incorporating latest generation LEDs. In addition to colour temperatures ranging between 3000K and 4000K, it has a long service life (50,000 hours) and excellent luminous flux maintenance. Anti-glare, screened optics without UV emissions are important features for the lighting of stores, showrooms and commercial centres.

Housing: in die-cast aluminium.

Reflector: in aluminium

Coating: UV-resistant polyester epoxy powder coating.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Universal Adapter

Luminous flux maintenance 80%: 50000h (L80B20)

Power factor: >0,9

Photobiological safety class: exempt group EN62471.

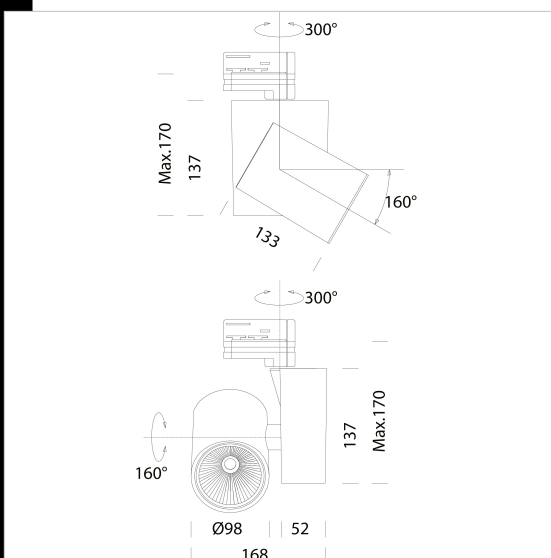

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22102610-00	CLD CELL	1,33	LED COB-2907lm-3000K-38°-CRI 92	33 W	WHITE
22102611-00	CLD CELL	1,33	LED COB-3098lm-4000K-38°-CRI 92	33 W	WHITE
22102630-00	CLD CELL	1,34	LED COB-2907lm-3000K-38°-CRI 92	33 W	BLACK
22102631-00	CLD CELL	1,35	LED COB-3098lm-4000K-38°-CRI 92	33 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated