

## Jolly 2

Flexibility, saving and light quality.

These are the strengths of this new track-mounted spotlight incorporating latest generation LEDs. In addition to colour temperatures ranging between 3000K and 4000K, it has a long service life (50,000 hours) and excellent luminous flux maintenance. Anti-glare, screened optics without UV emissions are important features for the lighting of stores, showrooms and commercial centres.

Housing: in die-cast aluminium.

Reflector: in aluminium

Coating: UV-resistant polyester epoxy powder coating.


Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, degree of protection according to EN 60529 standards.

Universal Adapter


Luminous flux maintenance 80%: 50000h (L80B20)

Power factor: >0,9

Photobiological safety class: exempt group EN62471.

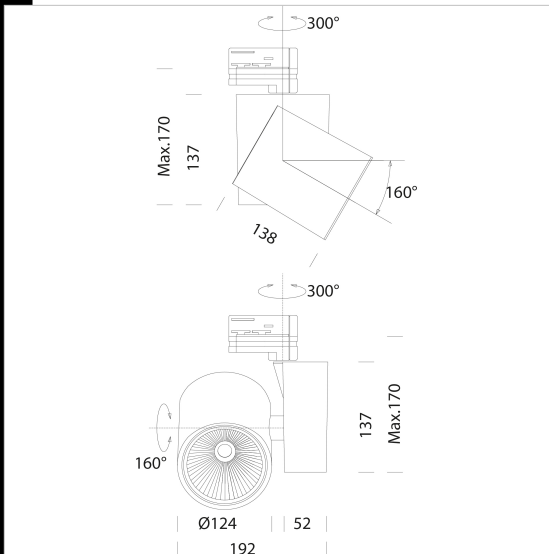

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22102710-00	CLD CELL	1,67	LED COB-3863lm-3000K-38°-CRI 92	49 W	WHITE
22102711-00	CLD CELL	1,68	LED COB-3977lm-4000K-38°-CRI 92	49 W	WHITE
22102730-00	CLD CELL	1,69	LED COB-3863lm-3000K-38°-CRI 92	49 W	BLACK
22102731-00	CLD CELL	1,75	LED COB-3977lm-4000K-38°-CRI 92	49 W	BLACK

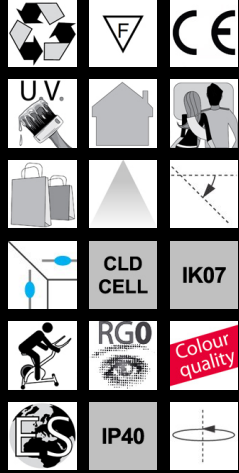

### Download

DXF 2D  
- jolly2nm.dxf

Montaggi  
- JOLLY rev7.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated