

Matrix Q9 Dark "A" - universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object. Housing: in die-cast aluminium. Optic compartment: front in black polycarbonate (the white colour version is available upon request). Lens: in PMMA with high efficiency output and very low glare rate. Equipment: supplied with universal adapter in track mounted versions. Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.



LED: High-efficiency light sources (CRI 90).

Luminous flux maintenance L80B20: 50.000h.

Power factor >0.95

Photobiological safety class: Exempt group

DALI dimmable version -1241 to be used with OMNITRACK PLUS track-mounted system.

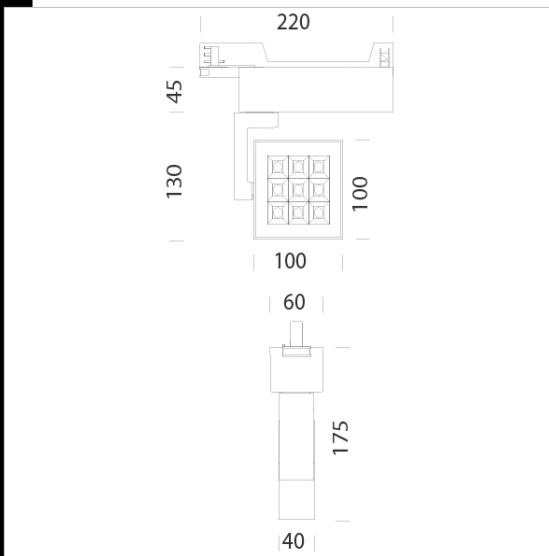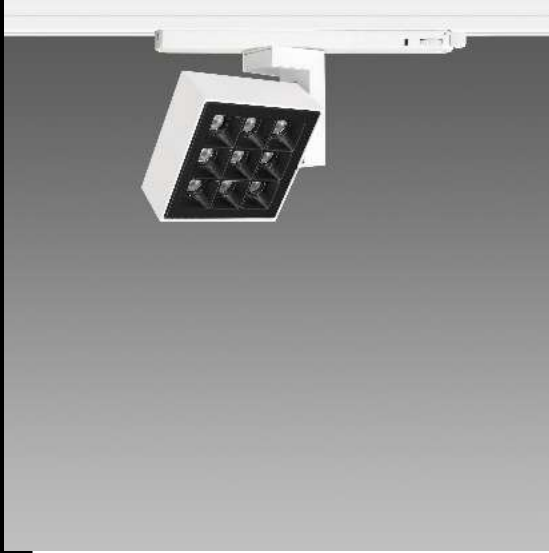

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22103010-00	CLD	0,71	LED-2403lm-3000K-32°-CRI>90	32 W	WHITE
22103030-00	CLD	0,72	LED-2403lm-3000K-32°-CRI>90	32 W	BLACK
22103011-00	CLD	0,71	LED-2584lm-4000K-32°-CRI>90	32 W	WHITE
22103031-00	CLD	0,81	LED-2584lm-4000K-32°-CRI>90	32 W	BLACK
22103012-00	CLD	0,71	LED-3065lm-3000K-38°-CRI>90	32 W	WHITE
22103032-00	CLD	0,80	LED-3065lm-3000K-38°-CRI>90	32 W	BLACK
22103013-00	CLD	0,80	LED-3296lm-4000K-38°-CRI>90	32 W	WHITE
22103033-00	CLD	0,71	LED-3296lm-4000K-38°-CRI>90	32 W	BLACK
22103014-00	CLD	0,71	LED-3067lm-3000K-50°-CRI>90	32 W	WHITE
22103034-00	CLD	0,72	LED-3067lm-3000K-50°-CRI>90	32 W	BLACK
22103015-00	CLD	0,71	LED-3298lm-4000K-50°-CRI>90	32 W	WHITE
22103035-00	CLD	0,71	LED-3298lm-4000K-50°-CRI>90	32 W	BLACK
22103010-1241	CLD-D-D	1,30	LED-2403lm-3000K-32°-CRI>90	32 W	WHITE
22103030-1241	CLD-D-D	1,30	LED-2403lm-3000K-32°-CRI>90	32 W	BLACK
22103011-1241	CLD-D-D	1,30	LED-2584lm-4000K-32°-CRI>90	32 W	WHITE
22103031-1241	CLD-D-D	0,73	LED-2584lm-4000K-32°-CRI>90	32 W	BLACK
22103012-1241	CLD-D-D	1,30	LED-3065lm-3000K-38°-CRI>90	32 W	WHITE
22103032-1241	CLD-D-D	0,80	LED-3065lm-3000K-38°-CRI>90	32 W	BLACK
22103013-1241	CLD-D-D	1,30	LED-3296lm-4000K-38°-CRI>90	32 W	WHITE
22103033-1241	CLD-D-D	0,72	LED-3296lm-4000K-38°-CRI>90	32 W	BLACK
22103014-1241	CLD-D-D	0,80	LED-3067lm-3000K-50°-CRI>90	32 W	WHITE
22103034-1241	CLD-D-D	0,80	LED-3067lm-3000K-50°-CRI>90	32 W	BLACK
22103015-1241	CLD-D-D	1,30	LED-3298lm-4000K-50°-CRI>90	32 W	WHITE
22103035-1241	CLD-D-D	1,30	LED-3298lm-4000K-50°-CRI>90	32 W	BLACK



Download

DXF 2D

- q9a.dxf

Montaggi

- MATRIX Q9 REV2.pdf

BIM

- Matrix Q9 Dark "A" - universal adapter - 20201005.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated