
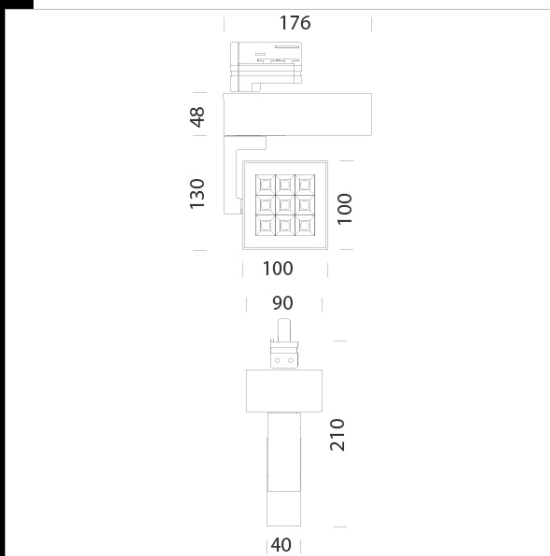



Matrix Q9 Dark "B" - universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object. Housing: in die-cast aluminium. Optic compartment: front in black polycarbonate (the white colour version is available upon request). Lens: in PMMA with high efficiency output and very low glare rate. Equipment: supplied with universal adapter in track mounted versions. Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.

LED: High-efficiency light sources (CRI 90).
Luminous flux maintenance L80B20: 50.000h.
Power factor >0.95
Photobiological safety class: Exempt group

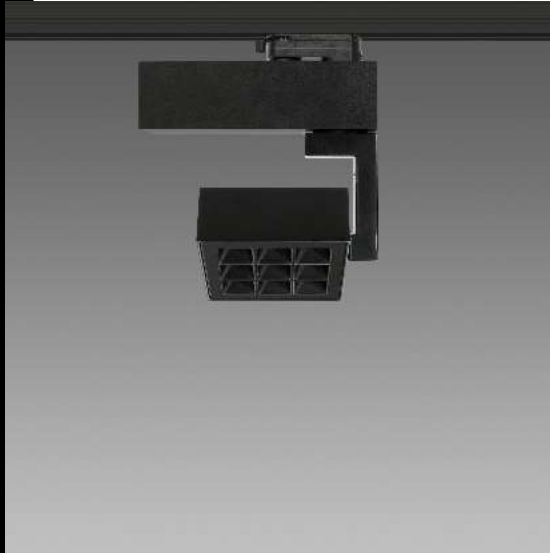

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|---------------|---------|------|-----------------------------|------|--------|
| 22103110-00 | CLD | 1,10 | LED-2403lm-3000K-32°-CRI>90 | 32 W | WHITE |
| 22103130-00 | CLD | 1,30 | LED-2403lm-3000K-32°-CRI>90 | 32 W | BLACK |
| 22103111-00 | CLD | 1,10 | LED-2584lm-4000K-32°-CRI>90 | 32 W | WHITE |
| 22103131-00 | CLD | 1,30 | LED-2584lm-4000K-32°-CRI>90 | 32 W | BLACK |
| 22103112-00 | CLD | 1,30 | LED-2471lm-3000K-38°-CRI>90 | 32 W | WHITE |
| 22103132-00 | CLD | 1,09 | LED-2471lm-3000K-38°-CRI>90 | 32 W | BLACK |
| 22103113-00 | CLD | 1,30 | LED-2657lm-4000K-38°-CRI>90 | 32 W | WHITE |
| 22103133-00 | CLD | 1,30 | LED-2657lm-4000K-38°-CRI>90 | 32 W | BLACK |
| 22103114-00 | CLD | 1,09 | LED-2486lm-3000K-50°-CRI>90 | 32 W | WHITE |
| 22103134-00 | CLD | 1,30 | LED-2486lm-3000K-50°-CRI>90 | 32 W | BLACK |
| 22103115-00 | CLD | 1,18 | LED-2674lm-4000K-50°-CRI>90 | 32 W | WHITE |
| 22103135-00 | CLD | 1,10 | LED-2674lm-4000K-50°-CRI>90 | 32 W | BLACK |
| 22103110-1241 | CLD-D-D | 1,30 | LED-2403lm-3000K-32°-CRI>90 | 32 W | WHITE |
| 22103130-1241 | CLD-D-D | 1,30 | LED-2403lm-3000K-32°-CRI>90 | 32 W | BLACK |
| 22103111-1241 | CLD-D-D | 1,30 | LED-2584lm-4000K-32°-CRI>90 | 32 W | WHITE |
| 22103131-1241 | CLD-D-D | 1,09 | LED-2584lm-4000K-32°-CRI>90 | 32 W | BLACK |
| 22103112-1241 | CLD-D-D | 1,30 | LED-2471lm-3000K-38°-CRI>90 | 32 W | WHITE |
| 22103132-1241 | CLD-D-D | 1,30 | LED-2471lm-3000K-38°-CRI>90 | 32 W | BLACK |
| 22103113-1241 | CLD-D-D | 1,30 | LED-2657lm-4000K-38°-CRI>90 | 32 W | WHITE |
| 22103133-1241 | CLD-D-D | 1,30 | LED-2657lm-4000K-38°-CRI>90 | 32 W | BLACK |
| 22103114-1241 | CLD-D-D | 1,30 | LED-2486lm-3000K-50°-CRI>90 | 32 W | WHITE |
| 22103134-1241 | CLD-D-D | 1,30 | LED-2486lm-3000K-50°-CRI>90 | 32 W | BLACK |
| 22103115-1241 | CLD-D-D | 1,10 | LED-2674lm-4000K-50°-CRI>90 | 32 W | WHITE |
| 22103135-1241 | CLD-D-D | 1,30 | LED-2674lm-4000K-50°-CRI>90 | 32 W | BLACK |

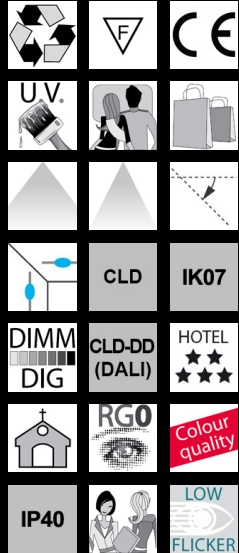

Download

DXF 2D
- q9b.dxf

Montaggi
- MATRIX Q9 REV2.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated