

Download

DXF 2D
- q9c2.dxf
Montaggi
- MATRIX Q9 REV2.pdf



Matrix Q9 Dark "A" - FS - universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object. Housing: in die-cast aluminium. Optic compartment: front in black polycarbonate (the white colour version is available upon request). Lens: in PMMA with high efficiency output and very low glare rate. Equipment: supplied with universal adapter in track mounted versions. Regulations: Manufactured in accordance with EN 60598-1-CEI 34.21 standards. Degree of protection in accordance with EN60529 standards.


LED: High-efficiency light sources (CRI 90).

Luminous flux maintenance L80B20: 50.000h.

Power factor >0.95

Photobiological safety class: Exempt group

DALI dimmable version -1241 to be used with OMNITRACK PLUS track-mounted system.

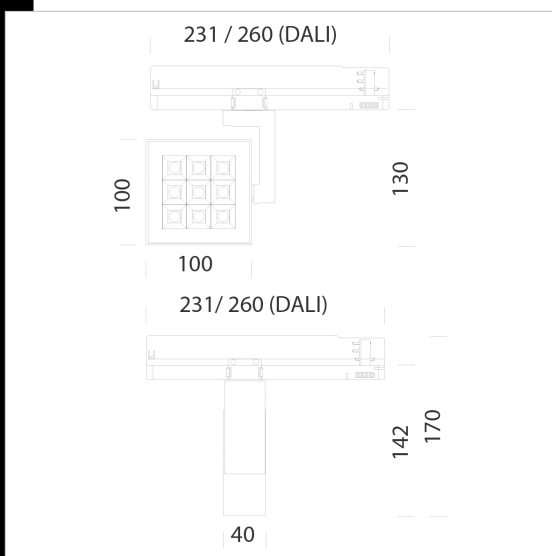

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22103210-00	CLD	0.56	LED-1173lm-3000K-10°-CRI 90	22 W	WHITE
22103230-00	CLD	1.30	LED-1173lm-3000K-10°-CRI 90	22 W	BLACK
22103212-00	CLD	0.56	LED-1098lm-3000K-13°-CRI>90	22 W	WHITE
22103232-00	CLD	0.56	LED-1098lm-3000K-13°-CRI>90	22 W	BLACK
22103216-00	CLD	0.56	LED-1580lm-3000K-10°-CRI>90	30 W	WHITE
22103236-00	CLD	0.56	LED-1580lm-3000K-10°-CRI>90	30 W	BLACK
22103217-00	CLD	0.56	LED-1505lm-3000K-13°-CRI>90	30 W	WHITE
22103237-00	CLD	0.56	LED-1505lm-3000K-13°-CRI>90	30 W	BLACK
22103210-1241	CLD-D-D	0.58	LED-1173lm-3000K-10°-CRI>90	22 W	WHITE
22103230-1241	CLD-D-D	0.58	LED-1173lm-3000K-10°-CRI>90	22 W	BLACK
22103212-1241	CLD-D-D	1.30	LED-1098lm-3000K-13°-CRI>90	22 W	WHITE
22103232-1241	CLD-D-D	0.58	LED-1098lm-3000K-13°-CRI>90	22 W	BLACK
22103216-1241	CLD-D-D	0.56	LED-1580lm-3000K-10°-CRI>90	30 W	WHITE
22103236-1241	CLD-D-D	0.66	LED-1580lm-3000K-10°-CRI>90	30 W	BLACK
22103217-1241	CLD-D-D	0.56	LED-1505lm-3000K-13°-CRI>90	30 W	WHITE
22103237-1241	CLD-D-D	0.56	LED-1505lm-3000K-13°-CRI>90	30 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated