


Matrix Focus - Universal adapter

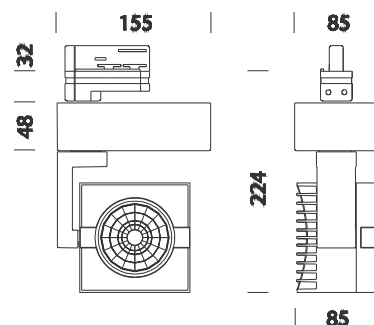

Code	Gear	Kg	Colour	W Tot	lamp
22103410-00	CLD CELL	2.00	white	25	LED COB 3000-3000lm-3000K-CRI 80
22103430-00	CLD CELL	2.00	black	25	LED COB 3000-3000lm-3000K-CRI 80
22103470-00	CLD CELL	2.00	met. silver	25	LED COB 3000-3000lm-3000K-CRI 80
22103410-12	CLD CELL-D	2.00	white	25	LED COB 3000-3000lm-3000K-CRI 80
22103430-12	CLD CELL-D	2.00	black	25	LED COB 3000-3000lm-3000K-CRI 80
22103470-12	CLD CELL-D	2.00	met. silver	25	LED DLM 3000-3000lm-3000K-CRI 80

Housing: in die-cast aluminium.

Reflector: in die-cast aluminium with anodised heat sink. Front in black, white or transparent polycarbonate material.

Equipment: supplied with universal adapter in track mounted versions. Complete with electronic power supply unit separated from the LEDs.

Upon request: 20° or 60° beam angle.

LED: Luminous flux maintenance L70B50: 50.000h. Power factor >0.9