

Focus - Universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: in die-cast aluminium with anodised heat sink.

Version with reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Coating: UV-resistant acrylic resin powder coating.

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.


on request: 31° - 52°

Luminous flux maintenance 50.000h (L80B20).


Power factor >0.95

Photobiological safety class: exempt group EN62471.

Upon request: CLD CELL-D (1-10V) version. DALI dimmable version -1241 and -6841 to be used with OMNITRACK PLUS track-mounted system.

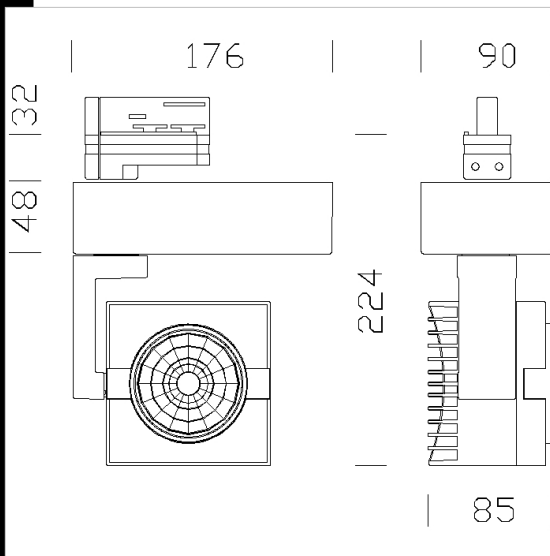

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22103410-00	CLD CELL	1.40	LED COB-2536lm-3000K-44°-CRI 92	26 W	WHITE
22103430-00	CLD CELL	1.40	LED COB-2536lm-3000K-44°-CRI 92	26 W	BLACK
22103470-00	CLD CELL	1.50	LED COB-2536lm-3000K-44°-CRI 92	26 W	SILVER
22103412-00	CLD CELL	1.30	LED COB-3842lm-3000K-44°-CRI 92	39 W	WHITE
22103432-00	CLD CELL	1.20	LED COB-3842lm-3000K-44°-CRI 92	39 W	BLACK
22103472-00	CLD CELL	1.55	LED COB-3842lm-3000K-44°-CRI 92	39 W	SILVER
22103414-00	CLD CELL	1.55	LED COB-4295lm-3000K-44°-CRI 92	46 W	WHITE
22103434-00	CLD CELL	1.66	LED COB-4295lm-3000K-44°-CRI 92	46 W	BLACK
22103474-00	CLD CELL	0.87	LED COB-4295lm-3000K-44°-CRI 92	46 W	SILVER
22103416-00	CLD CELL	1.55	LED COB-4897lm-3000K-44°-CRI 92	54 W	WHITE
22103436-00	CLD CELL	1.55	LED COB-4897lm-3000K-44°-CRI 92	54 W	BLACK
22103476-00	CLD CELL	1.57	LED COB-4897lm-3000K-44°-CRI 92	54 W	SILVER
22103410-1241	CLD CELL-D-D	1.48	LED COB-2536lm-3000K-44°-CRI 92	26 W	WHITE
22103430-1241	CLD CELL-D-D	1.48	LED COB-2536lm-3000K-44°-CRI 92	26 W	BLACK
22103470-1241	CLD CELL-D-D	1.50	LED COB-2536lm-3000K-44°-CRI 92	26 W	SILVER
22103412-1241	CLD CELL-D-D	1.56	LED COB-3842lm-3000K-44°-CRI 92	40 W	WHITE
22103432-1241	CLD CELL-D-D	1.20	LED COB-3842lm-3000K-44°-CRI 92	39 W	BLACK
22103472-1241	CLD CELL-D-D	1.55	LED COB-3842lm-3000K-44°-CRI 92	39 W	SILVER
22103414-1241	CLD CELL-D-D	1.55	LED COB-4295lm-3000K-44°-CRI 92	46 W	WHITE
22103434-1241	CLD CELL-D-D	1.66	LED COB-4295lm-3000K-44°-CRI 92	46 W	BLACK
22103474-1241	CLD CELL-D-D	0.87	LED COB-4295lm-3000K-44°-CRI 92	46 W	SILVER
22103416-1241	CLD CELL-D-D	1.55	LED COB-4897lm-3000K-44°-CRI 92	54 W	WHITE
22103436-1241	CLD CELL-D-D	1.55	LED COB-4897lm-3000K-44°-CRI 92	54 W	BLACK
22103476-1241	CLD CELL-D-D	1.57	LED COB-4897lm-3000K-44°-CRI 92	54 W	SILVER
22103410-68	CLD CELL	1.47	LED COB-2713lm-4000K-44°-CRI 92	28 W	WHITE
22103430-68	CLD CELL	1.54	LED COB-2713lm-4000K-44°-CRI 92	26 W	BLACK
22103470-68	CLD CELL	1.47	LED COB-2713lm-4000K-44°-CRI 92	26 W	SILVER
22103412-68	CLD CELL	1.50	LED COB-4111lm-4000K-44°-CRI 92	41 W	WHITE
22103432-68	CLD CELL	1.49	LED COB-4111lm-4000K-44°-CRI 92	39 W	BLACK
22103472-68	CLD CELL	1.58	LED COB-4111lm-4000K-44°-CRI 92	39 W	SILVER
22103414-68	CLD CELL	1.55	LED COB-4596lm-4000K-44°-CRI 92	46 W	WHITE
22103434-68	CLD CELL	1.66	LED COB-4596lm-4000K-44°-CRI 92	46 W	BLACK

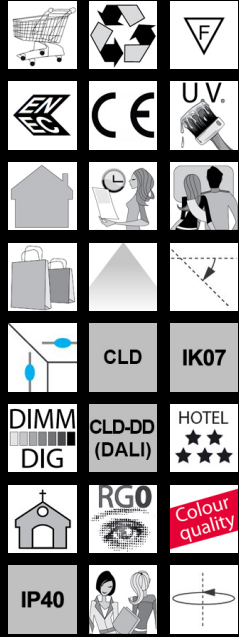

Download

DXF 2D
- maltrixfocusbin.dxf

3DS

- fosnova_matrix_focus_bracket_univers

3DM

- fosnova_matrix_focus_bracket_univers

Montaggi

- FOCUS rev6.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Focus - Universal adapter

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22103474-68	CLD CELL	0.87	LED COB-4596lm-4000K-44°-CRI 92	46 W	SILVER
22103416-68	CLD CELL	1.67	LED COB-5240lm-4000K-44°-CRI 92	54 W	WHITE
22103436-68	CLD CELL	1.55	LED COB-5240lm-4000K-44°-CRI 92	54 W	BLACK
22103476-68	CLD CELL	1.57	LED COB-5240lm-4000K-44°-CRI 92	54 W	SILVER
22103410-6841	CLD CELL-D-D	1.50	LED COB-2713lm-4000K-44°-CRI 92	26 W	SILVER
22103430-6841	CLD CELL-D-D	1.48	LED COB-2713lm-4000K-44°-CRI 92	26 W	BLACK
22103470-6841	CLD CELL-D-D	1.48	LED COB-2713lm-4000K-44°-CRI 92	26 W	BLACK
22103412-6841	CLD CELL-D-D	1.55	LED COB-4111lm-4000K-44°-CRI 92	39 W	SILVER
22103432-6841	CLD CELL-D-D	1.20	LED COB-4111lm-4000K-44°-CRI 92	39 W	BLACK
22103472-6841	CLD CELL-D-D	1.55	LED COB-4111lm-4000K-44°-CRI 92	39 W	SILVER
22103414-6841	CLD CELL-D-D	1.55	LED COB-4596lm-4000K-44°-CRI 92	46 W	WHITE
22103434-6841	CLD CELL-D-D	1.66	LED COB-4596lm-4000K-44°-CRI 92	46 W	BLACK
22103474-6841	CLD CELL-D-D	0.87	LED COB-4596lm-4000K-44°-CRI 92	46 W	SILVER
22103416-6841	CLD CELL-D-D	1.55	LED COB-5240lm-4000K-44°-CRI 92	54 W	WHITE
22103436-6841	CLD CELL-D-D	1.55	LED COB-5240lm-4000K-44°-CRI 92	54 W	BLACK
22103476-6841	CLD CELL-D-D	1.57	LED COB-5240lm-4000K-44°-CRI 92	54 W	SILVER

Accessories



- Universal adapter recessed



- Universal adapter base

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated