

Focus with lens - Universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: in die-cast aluminium.

Version with lens: in PMMA with high efficiency output and very low glare rate

Coating: UV-resistant acrylic resin powder coating.

Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree


of protection pursuant to EN 60529.

on request: 38° - 60°

Luminous flux maintenance 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

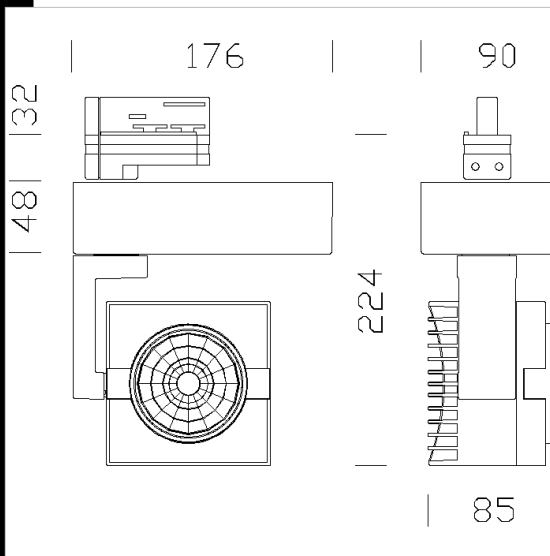

Download

DXF 2D
- matrixfocusbin.dxf

Montaggi
- Focus rev5.pdf

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|---------------|--------------|------|---------------------------------|------|--------|
| 22103510-00 | CLD CELL | 1.70 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | WHITE |
| 22103530-00 | CLD CELL | 1.69 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | BLACK |
| 22103570-00 | CLD CELL | 1.70 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | SILVER |
| 22103512-00 | CLD CELL | 1.70 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | WHITE |
| 22103532-00 | CLD CELL | 1.66 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | BLACK |
| 22103572-00 | CLD CELL | 1.66 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | SILVER |
| 22103514-00 | CLD CELL | 1.58 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | WHITE |
| 22103534-00 | CLD CELL | 1.67 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | BLACK |
| 22103574-00 | CLD CELL | 1.65 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | SILVER |
| 22103516-00 | CLD CELL | 1.59 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | WHITE |
| 22103536-00 | CLD CELL | 1.67 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | BLACK |
| 22103576-00 | CLD CELL | 1.68 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | SILVER |
| 22103510-1241 | CLD CELL-D-D | 1.70 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | WHITE |
| 22103530-1241 | CLD CELL-D-D | 1.69 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | BLACK |
| 22103570-1241 | CLD CELL-D-D | 1.70 | LED COB-2490lm-3000K-20°-CRI 92 | 26 W | SILVER |
| 22103512-1241 | CLD CELL-D-D | 1.70 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | WHITE |
| 22103532-1241 | CLD CELL-D-D | 1.66 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | BLACK |
| 22103572-1241 | CLD CELL-D-D | 1.66 | LED COB-3628lm-3000K-20°-CRI 92 | 39 W | SILVER |
| 22103514-1241 | CLD CELL-D-D | 1.58 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | WHITE |
| 22103534-1241 | CLD CELL-D-D | 1.67 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | BLACK |
| 22103574-1241 | CLD CELL-D-D | 1.65 | LED COB-4326lm-3000K-38°-CRI 92 | 46 W | SILVER |
| 22103516-1241 | CLD CELL-D-D | 1.59 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | WHITE |
| 22103536-1241 | CLD CELL-D-D | 1.67 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | BLACK |
| 22103576-1241 | CLD CELL-D-D | 1.68 | LED COB-4815lm-3000K-60°-CRI 92 | 54 W | SILVER |
| 22103510-68 | CLD CELL | 1.70 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | WHITE |
| 22103530-68 | CLD CELL | 1.69 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | BLACK |
| 22103570-68 | CLD CELL | 1.70 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | SILVER |
| 22103512-68 | CLD CELL | 1.70 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | WHITE |
| 22103532-68 | CLD CELL | 1.66 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | BLACK |
| 22103572-68 | CLD CELL | 1.66 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | SILVER |
| 22103514-68 | CLD CELL | 1.89 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | WHITE |
| 22103534-68 | CLD CELL | 1.67 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | BLACK |

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Focus with lens - Universal adapter

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour |
|---------------|--------------|------|---------------------------------|------|--------|
| 22103574-68 | CLD CELL | 1.65 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | SILVER |
| 22103536-68 | CLD CELL | 1.89 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | BLACK |
| 22103516-68 | CLD CELL | 1.69 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | WHITE |
| 22103576-68 | CLD CELL | 1.79 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | SILVER |
| 22103510-6841 | CLD CELL-D-D | 1.70 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | WHITE |
| 22103530-6841 | CLD CELL-D-D | 1.69 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | BLACK |
| 22103570-6841 | CLD CELL-D-D | 1.70 | LED COB-3146lm-4000K-20°-CRI 92 | 26 W | SILVER |
| 22103512-6841 | CLD CELL-D-D | 1.70 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | WHITE |
| 22103532-6841 | CLD CELL-D-D | 1.66 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | BLACK |
| 22103572-6841 | CLD CELL-D-D | 1.66 | LED COB-3882lm-4000K-20°-CRI 92 | 39 W | SILVER |
| 22103514-6841 | CLD CELL-D-D | 1.58 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | WHITE |
| 22103534-6841 | CLD CELL-D-D | 1.84 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | BLACK |
| 22103574-6841 | CLD CELL-D-D | 1.65 | LED COB-4629lm-4000K-38°-CRI 92 | 46 W | SILVER |
| 22103536-6841 | CLD CELL-D-D | 1.76 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | BLACK |
| 22103516-6841 | CLD CELL-D-D | 1.59 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | WHITE |
| 22103576-6841 | CLD CELL-D-D | 1.68 | LED COB-5152lm-4000K-60°-CRI 92 | 54 W | SILVER |

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated