

Download


DXF 2D
- trim50b3.dxf

Montaggi
- TRIMLESS-B_50-70-111 rev3.pdf



Trimless 50 - B3

Housing: in die-cast aluminium with adjustable and tilting spotlights.
Equipment: equipped with galvanised steel support brackets which guarantee perfect attachment to suspended ceiling from 12 mm to 25 mm thick.
Reflector: high-efficiency metallised polycarbonate. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
LED: High-efficiency light sources (CRI 90).
Power factor: ≥ 0.95
Photobiological safety class: Exempt group.
Luminous flux maintenance 80%: 50.000h (L80B20).
recessed $\varnothing$ 277x106mm

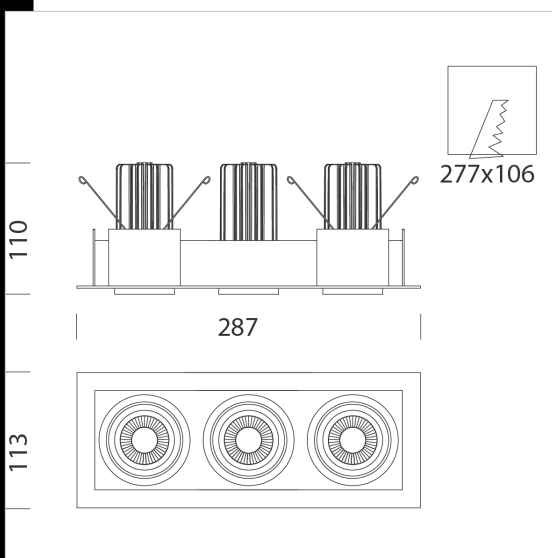

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22105310-00	CLD	1,70	LED COB3x-505lm-3000K-15°-CRI 90	30 W	WHITE
22105310-1241	CLD CELLDD	1,70	LED COB3x-505lm-3000K-15°-CRI 90	30 W	WHITE
22105311-00	CLD	1,70	LED COB3x-543lm-4000K-15°-CRI 90	30 W	WHITE
22105311-1241	CLD CELLDD	1,70	LED COB3x-543lm-4000K-15°-CRI 90	30 W	WHITE
22105312-00	CLD	2,20	LED COB3x-479lm-3000K-25°-CRI 90	30 W	WHITE
22105312-1241	CLD CELLDD	1,70	LED COB3x-479lm-3000K-25°-CRI 90	30 W	WHITE
22105313-00	CLD	1,70	LED COB3x-1005lm-4000K-25°-CRI 90	30 W	WHITE
22105313-1241	CLD CELLDD	1,70	LED COB3x-1005lm-4000K-25°-CRI 90	30 W	WHITE
22105314-00	CLD	2,20	LED COB3x-975lm-3000K-40°-CRI 90	36 W	WHITE
22105314-1241	CLD CELLDD	1,70	LED COB3x-975lm-3000K-40°-CRI 90	30 W	WHITE
22105315-00	CLD	1,70	LED COB3x-457lm-4000K-40°-CRI 90	30 W	WHITE
22105315-1241	CLD CELLDD	1,70	LED COB3x-457lm-4000K-40°-CRI 90	30 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated