


Download

DXF 2D
- trim70a1.dxf
Montaggi
- TRIMLESS A 50-70-111 rev5.pdf



Trimless 70 - A1

Housing: in die-cast aluminium with adjustable and tilting spotlights.
Equipment: equipped with galvanised steel support brackets which guarantee perfect attachment to suspended ceiling from 12 mm to 25 mm thick.
Reflector: high-efficiency metallised polycarbonate. Regulations:
Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
LED: High-efficiency light sources (CRI 90).
Power factor: ≥ 0.95
Photobiological safety class: Exempt group.
Luminous flux maintenance 80%: 50.000h (L80B20).
recessed Ø 130x130mm

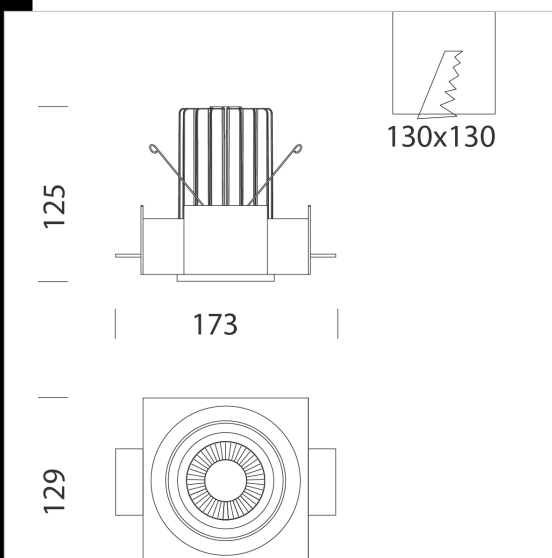

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22107130-00	CLD	1.10	LED COB-2160lm-3000K-21°-CRI 90	25 W	BLACK
22107130-1241	CLD-D-D	1.10	LED COB-2160lm-3000K-21°-CRI 90	25 W	BLACK
22107131-00	CLD	1.70	LED COB-2225lm-4000K-21°-CRI 90	25 W	BLACK
22107131-1241	CLD-D-D	1.70	LED COB-2225lm-4000K-21°-CRI 90	25 W	BLACK
22107132-00	CLD	1.10	LED COB-1847lm-3000K-28°-CRI 90	25 W	BLACK
22107132-1241	CLD-D-D	1.09	LED COB-1847lm-3000K-28°-CRI 90	25 W	BLACK
22107133-00	CLD	1.10	LED COB-1986lm-4000K-28°-CRI 90	25 W	BLACK
22107133-1241	CLD-D-D	1.70	LED COB-1986lm-4000K-28°-CRI 90	25 W	BLACK
22107134-00	CLD	1.10	LED COB-1912lm-3000K-40°-CRI 90	25 W	BLACK
22107134-1241	CLD-D-D	1.70	LED COB-1912lm-3000K-40°-CRI 90	25 W	BLACK
22107135-00	CLD	1.10	LED COB-2056lm-4000K-40°-CRI 90	25 W	BLACK
22107135-1241	CLD-D-D	1.70	LED COB-2056lm-4000K-40°-CRI 90	25 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated