




Download

DXF 2D
- 108010.dxf

Montaggi
- FOCUS rev6.pdf

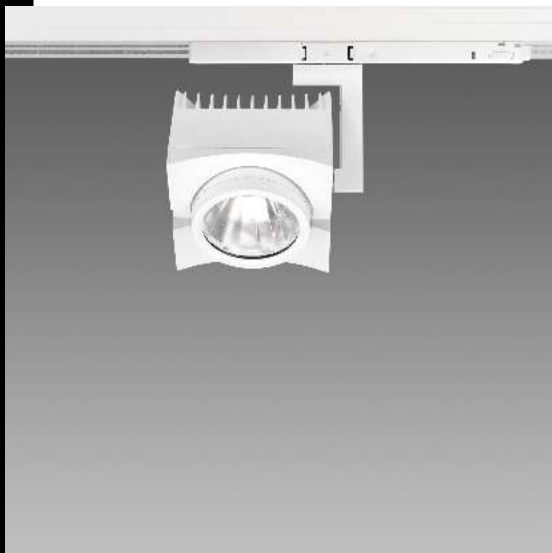

Focus "B" - universal adapter

This version features a particular shape and a design with clean lines that can meet different architectonic lighting needs using high colour rendering LEDs. It is an all-new spotlight, which is entirely adjustable for an extraordinarily effective lighting project that adds value to any space and object

Housing: die-cast aluminum with anodized heatsink. Version with reflector: in die-cast polished aluminium, high efficiency and anti-glare.

Coating: UV-resistant acrylic resin powder coating. Standard: manufactured pursuant to EN 60598-1-CEI 34.21 and with a degree of protection pursuant to EN 60529.


on request: 31° - 52°

Luminous flux maintenance 50.000h (L80B20).

Power factor >0.95

Photobiological safety class: exempt group EN62471.

Upon request: CLD CELL-D (1-10V) version. DALI dimmable version -1241 and -6841 to be used with OMNITRACK PLUS track-mounted system.

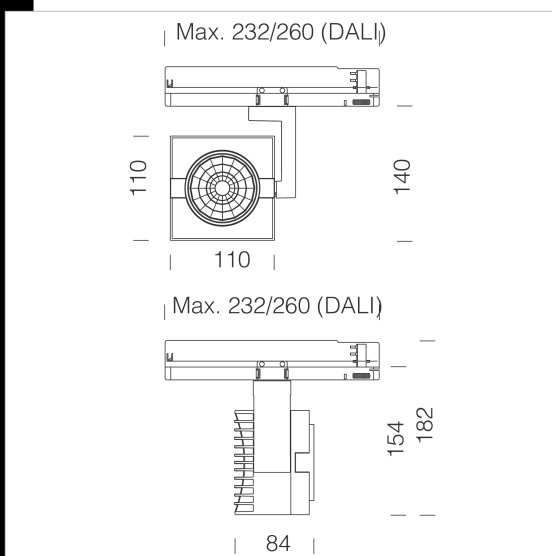

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22108010-00	CLD CELL	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	WHITE
22108030-00	CLD CELL	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	BLACK
22108070-00	CLD CELL	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	SILVER
22108010-68	CLD CELL	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	WHITE
22108030-68	CLD CELL	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	BLACK
22108070-68	CLD CELL	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	SILVER
22108010-1241	CLD CELL-D-D	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	WHITE
22108030-1241	CLD CELL-D-D	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	BLACK
22108070-1241	CLD CELL-D-D	1.40	LED COB-2536lm-3000K-44°-CRI 92	27 W	SILVER
22108010-6841	CLD CELL-D-D	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	WHITE
22108030-6841	CLD CELL-D-D	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	BLACK
22108070-6841	CLD CELL-D-D	1.40	LED COB-2713lm-4000K-44°-CRI 92	27 W	SILVER
22108110-00	CLD CELL	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	WHITE
22108130-00	CLD CELL	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	BLACK
22108170-00	CLD CELL	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	SILVER
22108110-68	CLD CELL	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	WHITE
22108130-68	CLD CELL	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	BLACK
22108170-68	CLD CELL	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	SILVER
22108110-1241	CLD CELL-D-D	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	WHITE
22108130-1241	CLD CELL-D-D	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	BLACK
22108170-1241	CLD CELL-D-D	1.40	LED COB-3842lm-3000K-44°-CRI 92	39 W	SILVER
22108110-6841	CLD CELL-D-D	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	WHITE
22108130-6841	CLD CELL-D-D	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	BLACK
22108170-6841	CLD CELL-D-D	1.40	LED COB-4111lm-4000K-44°-CRI 92	39 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated