


Trimless 111 - A3

Housing: in die-cast aluminium with adjustable and tilting spotlights.
Equipment: equipped with galvanised steel support brackets which guarantee perfect attachment to suspended ceiling from 12 mm to 25 mm thick.
Reflector: high-efficiency metallised polycarbonate. Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
LED: High-efficiency light sources (CRI 90).
Power factor: ≥ 0.95
Photobiological safety class: Exempt group.
Luminous flux maintenance 80%: 50.000h (L80B20).
recessed $\varnothing$ 457x156mm

Download

DXF 2D
- trim111a3.dxf

Montaggi
- TRIMLESS A 50-70-111 rev5.pdf

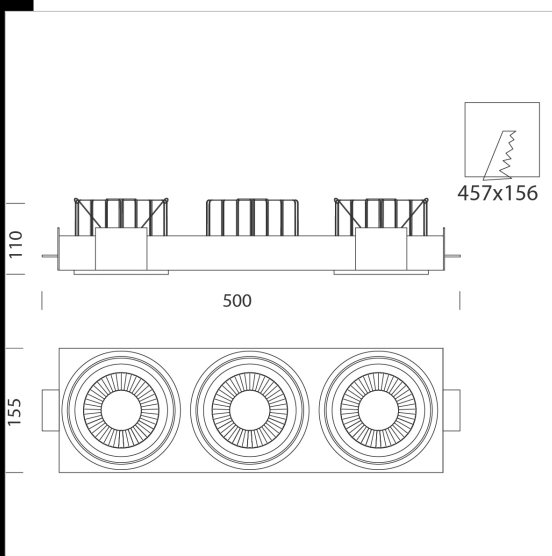

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22111330-00	CLD	1,70	LED COB3x-3089lm-3000K-15°-CRI 90	114 W	BLACK
22111330-1241	CLD CELLDD	1,70	LED COB3x-3089lm-3000K-15°-CRI 90	120 W	BLACK
22111331-00	CLD	1,70	LED COB3x-3322lm-4000K-15°-CRI 90	114 W	BLACK
22111331-1241	CLD CELLDD	1,70	LED COB3x-3322lm-4000K-15°-CRI 90	120 W	BLACK
22111332-00	CLD	1,70	LED COB3x-3029lm-3000K-25°-CRI 90	114 W	BLACK
22111332-1241	CLD CELLDD	1,70	LED COB3x-3029lm-3000K-25°-CRI 90	120 W	BLACK
22111333-00	CLD	3,90	LED COB3x-3257lm-4000K-25°-CRI 90	114 W	BLACK
22111333-1241	CLD CELLDD	1,70	LED COB3x-3257lm-4000K-25°-CRI 90	120 W	BLACK
22111334-00	CLD	1,70	LED COB3x-2988lm-3000K-40°-CRI 90	114 W	BLACK
22111334-1241	CLD CELLDD	1,70	LED COB3x-2988lm-3000K-40°-CRI 90	120 W	BLACK
22111335-00	CLD	3,90	LED COB3x-3213lm-4000K-40°-CRI 90	114 W	BLACK
22111335-1241	CLD CELLDD	1,70	LED COB3x-3213lm-4000K-40°-CRI 90	120 W	BLACK

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated