




#### Download

DXF 2D  
- prof220.dxf  
Montaggi  
- PROFESSIONAL\_GLOSSY rev1.pdf



#### Professional 3 glossy

Housing: in die cast aluminium.  
Reflector: optics in aluminium to optimise light efficiency. Lens: in PMMA with high efficiency output and very low glare rate Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings. Coating: dust painted, using polyester epoxy paint to withstand UV rays. Standard supply: Includes adjustable steel bracket. luminous flux maintenance L80B20: 50.000h. Power factor >0.9. Photobiological safety class: Exempt group

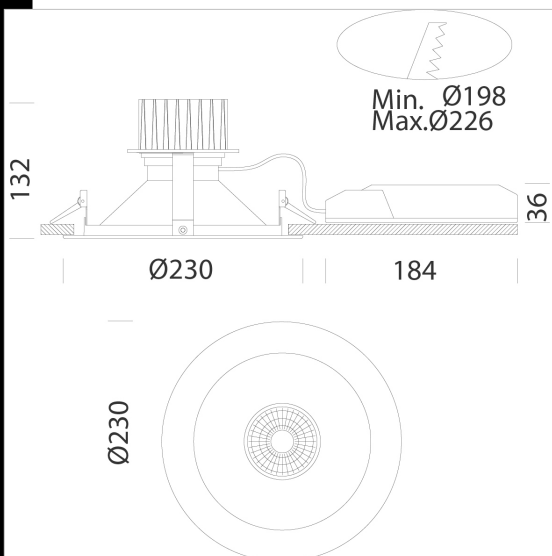

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22117210-00	CLD CELL	1.14	LED COB-3292lm-3000K-60°-CRI 93	32 W	WHITE
22117211-00	CLD CELL	1.12	LED COB-3465lm-4000K-60°-CRI 93	32 W	WHITE
22117310-00	CLD CELL	1.13	LED COB-3921lm-3000K-60°-CRI 93	39 W	WHITE
22117311-00	CLD CELL	1.11	LED COB-3970lm-4000K-60°-CRI 93	39 W	WHITE

#### Accessories



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated